



MASTER TL5 High Output



MASTER TL5 HO 49W/840 1SL/40

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information			
Cap base	G5		
Features	na [Not Applicable]		
Flux measurement reference	Sphere		
Light Technical			
Colour Code	840 [CCT of 4000K]		
Luminous Flux	4,375 lm		
Colour designation	Cool White (CW)		
Chromaticity Coordinate X (Nom)	0.38		
Chromaticity Coordinate Y (Nom)	0.38		
Correlated Colour Temperature	4000 K		
Luminous efficacy (rated) (nom.)	89 lm/W		
Colour rendering index (CRI)	80		
Operating and Electrical			
Power Consumption	49.3 W		
Lamp current (nom.)	0.255 A		

Controls and Dimming			
Dimmable	Yes		
Mechanical and Housing			
Bulb shape	T5 [16 mm (T5)]		
Approval and Application			
Energy Efficiency Class	G		
Mercury (Hg) content (nom.)	1.2 mg		
Energy consumption kWh/1,000 hours	50 kWh		
EPREL registration number	423548		
Product Data			
Order product name	MASTER TL5 HO 49W/840 SLV/40		
Full product name	MASTER TL5 HO 49W/840 1SL/40		
Full EOC	871150063956155		
Order code	63956155		
Material no. (12 NC)	927927584055		
Local order code	49840		


Datasheet, 2023, April 16 data subject to change

MASTER TL5 High Output

SAP numerator – quantity per pack	1	
EAN/UPC — Product/Case	8711500639561	
Numerator – packs per outer box	40	


EAN/UPC - Case	8711500867728

Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO 49W/840	17 mm	1,449.0 mm	1,456.1 mm	1,453.7 mm	1,463.2 mm
SLV/40					


Photometric data

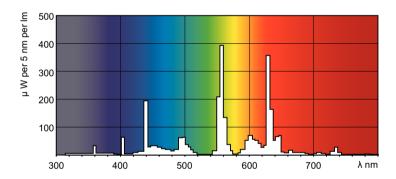

Spectral Power Distribution Colour - MASTER TL5 HO 49W/840 SLV/40

Lifetime

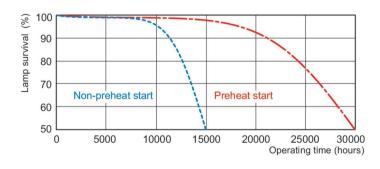

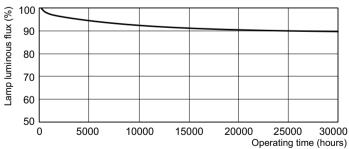

Life Expectancy Diagram - MASTER TL5 HO 49W/840 SLV/40

Lumen Maintenance Diagram - MASTER TL5 HO 49W/840 SLV/40

MASTER TL5 High Output

Lifetime

Life Expectancy Diagram - MASTER TL5 HO 49W/840 SLV/40



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.