



MASTER PL-S 4 Pin

MASTER PL-S 11W/840/4P 1CT/10

Energy-saving compact fluorescent lamps Compact long-arc low-pressure mercury discharge lamp Envelope consists of 2 parallel narrow fluorescent tubes

Product data

General Information	
Cap base	2G7 [2G7]
Life to 50% failures preheat (nom.)	13000 h
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	98 %
LSF Preheat 6000 h Rated	97 %
LSF Preheat 8000 h Rated	92 %
LSF Preheat 16000 h Rated	30 %
Light Technical	
Colour Code	840 [CCT of 4,000 K]
Lamp Luminous Flux 25°C EL (Nom)	900 lm
Lamp Luminous Flux (Nom)	900 lm
Colour Designation	Cool White (CW)
Colour Temperature, horizontal (Nom)	4000 K
Lamp Luminous Efficacy EM (Nom)	82 lm/W
Colour Rendering Index, horiz (Nom)	82
LLMF 2000 h Rated	95 %
LLMF 4000 h Rated	92 %
LLMF 6000 h Rated	90 %
LLMF 8000 h Rated	88 %
LLMF 12000 h Rated	86 %
Operating and Electrical	
Power (Rated) (Nom)	11.6 W

Lamp current (nom.)	0.160 A
Temperature	
Design temperature (nom.)	28 °C
Controls and Dimming	
Dimmable	yes
Mechanical and Housing	
Cap base information	4P
Approval and Application	
Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	1.4 mg
Energy Consumption kWh/1000 h	13 kWh
Product Data	
Full product code	871869960692300
Order product name	MASTER PL-S 11W/840/4P 1CT/10
EAN/UPC – product	8718699606923
Order code	927936684065
Local Code	MPLS11W8404P
Numerator – quantity per pack	1
Numerator – packs per outer box	10
Material no. (12NC)	927936684065


MASTER PL-S 4 Pin

Net weight (piece)	41.000 g
ILCOS Code	FSD-11/40/1B-E-2G7

Warnings and Safety

- Lamp light technical and electrical characteristics are influenced by operating conditions, i.e. lamp ambient temperature and operating position as well as applied HF control gear
- Shorter lamp life when often switching and not well pre-heated electrodes
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




Product	D (max)	D1 (max)	A (max)	B (max)	C (max)
MASTER PL-S 11W/840/4P 1CT/10	28 mm	13 mm	196 mm	214 mm	219.9 mm

PL-S 11W/840/4P LM

Photometric data

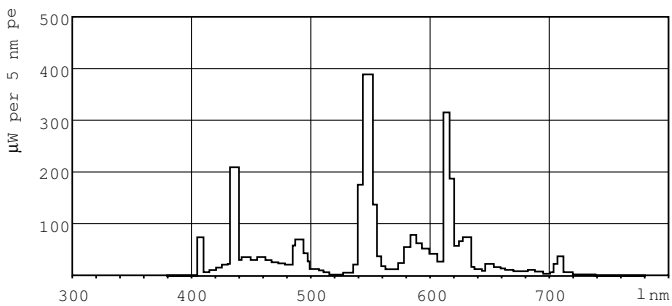

Lightcolour /840

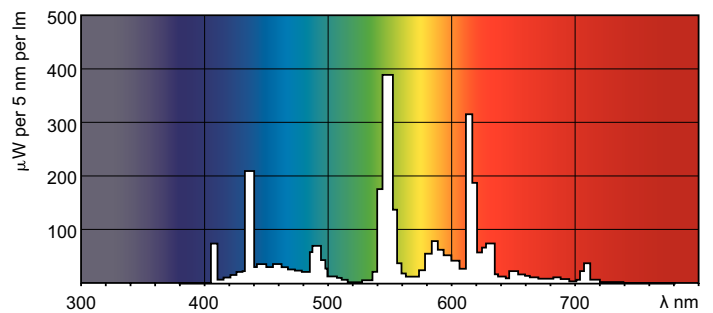

Lightcolour /840

MASTER PL-S 4 Pin

Lifetime

