



T8 900 Series Rapid Start

F32T8/TL950 SLV

Philips leads the industry with the lowest level mercury technology. Reducing the mercury level (source reduction) during the manufacturing phase is essential to creating products that are less harmful to the environment.

Product data


| General Information | |
|------------------------------------|---------------------------------|
| Cap-Base | G13 [Medium Bi-Pin Fluorescent] |
| Life to 50% Failures (Nom) | 15,000 hour(s) |
| Light Technical | |
| Color Code | TL950 [CCT of 5000K (950)] |
| Luminous Flux | 2,000 lm |
| Color Designation | TL950 |
| Correlated Color Temperature (Nom) | 5000 K |
| Luminous Efficacy (rated) (Nom) | 63.9 lm/W |
| Color rendering index (CRI) | 98 |
| Operating and Electrical | |
| Power Consumption | 32 W |
| Lamp Current (Nom) | 0.265 A |
| Wattage Equivalent | 32 W |
| Voltage (Nom) | 139 V |
| Voltage (Nom) | 139 V |
| Controls and Dimming | |
| Dimmable | Yes |

| Mechanical and Housing | |
|---------------------------------|-----------------|
| Bulb Shape | T-8 |
| Approval and Application | |
| Mercury (Hg) Content (Nom) | 5.0 mg |
| Product Data | |
| Order product name | F32T8/TL950 SLV |
| Full product name | F32T8/TL950 SLV |
| Order code | 927942009520 |
| Material Nr. (12NC) | 927942009520 |
| Numerator - Quantity Per Pack | 1 |
| EAN/UPC - Product/Case | 046677209056 |
| Numerator - Packs per outer box | 25 |
| EAN/UPC - Case | 50046677209051 |


T8 900 Series Rapid Start

Dimensional drawing

| Product |
|-----------------|
| F32T8/TL950 SLV |



Photometric data

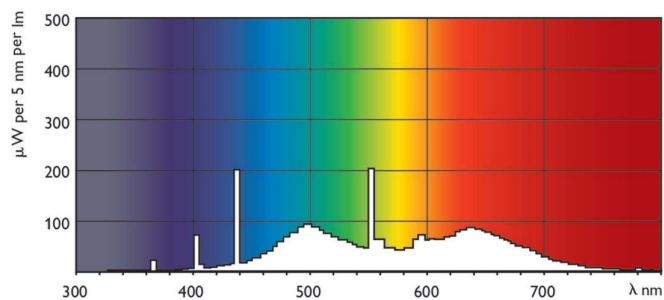

Spectral Power Distribution Colour - F32T8/TL950 SLV

