



TL-D LIFEMAX Super 80

TL-D 30W/830 1SL/25

The TL-D LIFEMAX Super 80 lamp offers more lumens per watt and better color rendering than TL-D standard colors. Furthermore, it has a lower mercury content. The lamp can be operated in existing TL-D luminaires.

Product data

| General Information | |
|------------------------------------|----------------------------------|
| Cap-Base | G13 [Medium Bi-Pin Fluorescent] |
| Life To 10% Failures (Nom) | 10000 h |
| Life to 50% Failures (Nom) | 13000 h |
| Life to 50% Failures Preheat (Nom) | 20000 h |

| Light Technical | |
|------------------------------------|---------------------|
| Color Code | 830 [CCT of 3000K] |
| Luminous Flux (Rated) (Nom) | 2400 lm |
| Color Designation | Warm White (WW) |
| Lumen Maintenance 2000 h (Nom) | 96 % |
| Lumen Maintenance 5000 h (Nom) | 94 % |
| Correlated Color Temperature (Nom) | 3000 K |
| Luminous Efficacy (rated) (Nom) | 80 lm/W |
| Color Rendering Index (Nom) | 83 |

| Operating and Electrical | |
|--------------------------|---------|
| Power (Rated) (Nom) | 30 W |
| Lamp Current (Nom) | 0.360 A |
| Voltage (Nom) | 98 V |

| Controls and Dimming | |
|----------------------|-----|
| Dimmable | Yes |

| Mechanical and Housing | |
|------------------------|-----------|
| Cap-Base Information | Green Cap |

| Approval and Application | |
|-------------------------------|--------|
| Energy Efficiency Label (EEL) | A |
| Mercury (Hg) Content (Nom) | 2.0 mg |

| Product Data | |
|---------------------------------|---------------------|
| Full product code | 871150028582900 |
| Order product name | TL-D 30W/830 1SL/25 |
| EAN/UPC - Product | 8711500285829 |
| Order code | 927981283036 |
| Numerator - Quantity Per Pack | 1 |
| Numerator - Packs per outer box | 25 |
| Material Nr. (12NC) | 927981283036 |
| Net Weight (Piece) | 0.130 kg |

TL-D LIFEMAX Super 80


Dimensional drawing




TL-D 30W/830/GC

| Product | D (max) | A (max) | B (max) | B (min) | C (max) |
|---------------------|---------|----------|----------|----------|----------|
| TL-D 30W/830 1SL/25 | 28 mm | 894.6 mm | 901.7 mm | 899.3 mm | 908.8 mm |

Photometric data

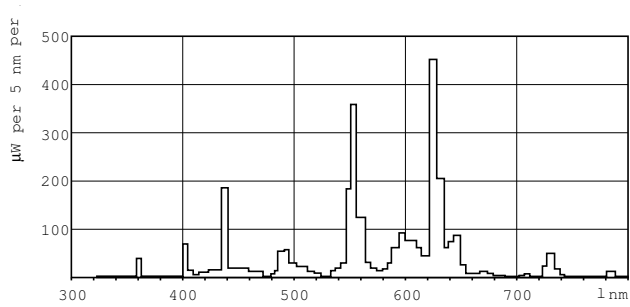


Lightcolor /830

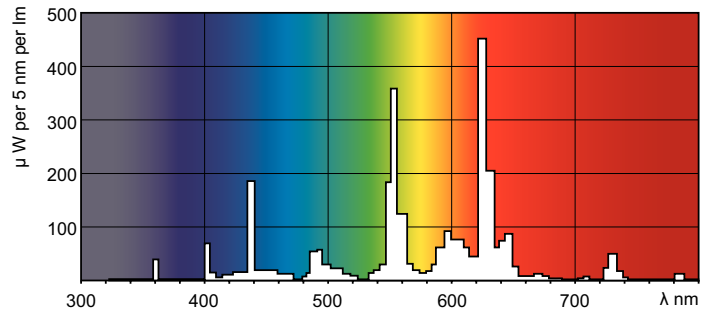


Lightcolor /830

Lifetime

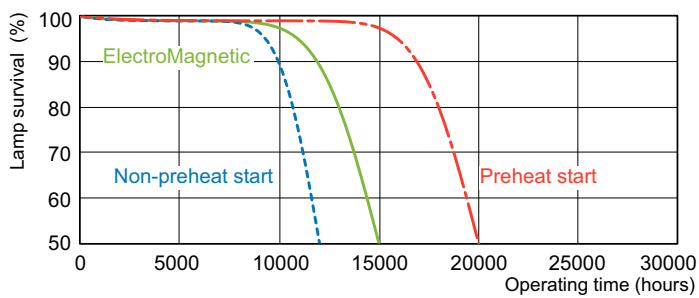


TL-D Super 80 Life Expectancy 3 h cycle

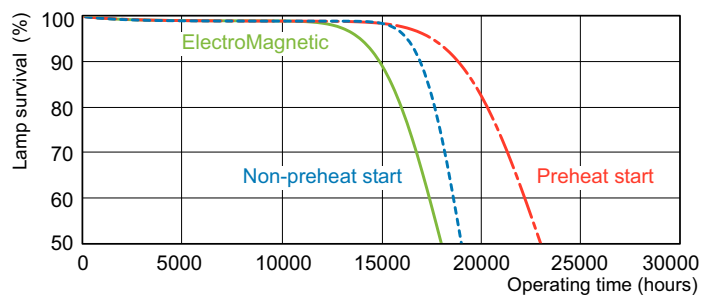

TL-D Super 80 Life Expectancy 12 h cycle

TL-D LIFEMAX Super 80

Lifetime

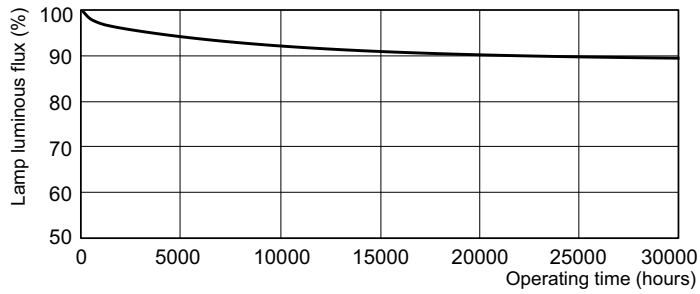

TL-D Super 80 Lumen Maintenance 3 h + 12 h cycle

