



MASTER TL-D Super 80

TL-D 36W/865 1SL/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

Product data


General Information		Mechanical and Housing	
Cap base	G13 [Medium Bi-Pin Fluorescent]	Cap base information	Green [Green Cap]
Life to 10% failures (nom.)	10000 h		
Life to 50% failures (nom.)	15000 h		
Life to 50% failures preheat (nom.)	20000 h		
Light Technical		Approval and Application	
Colour Code	865 [CCT of 6,500 K]	Energy efficiency label (EEL)	A
Lamp Luminous Flux (Nom)	3070 lm	Mercury (Hg) content (nom.)	2.0 mg
Colour Designation	Cool Daylight		
Lumen maintenance 2,000 hours (nom.)	96 %		
Lumen maintenance 5,000 hours (nom.)	94 %		
Colour Temperature, horizontal (Nom)	6500 K		
Lamp Luminous Efficacy EM (Nom)	85 lm/W		
Colour Rendering Index,horiz (Nom)	80		
Operating and Electrical		Product Data	
Power (Rated) (Nom)	36 W	Full product code	871829125462100
Lamp current (nom.)	0.440 A	Order product name	TL-D 36W/865 1SL/25
Voltage (Nom)	103 V	EAN/UPC – product	8718291254621
		Order code	927981386524
		Local Code	TLD36W865ALTO
		Numerator – quantity per pack	1
		Numerator – packs per outer box	25
		Material no. (12NC)	927981386524
		Net weight (piece)	0.140 kg
Controls and Dimming			
Dimmable	yes		

MASTER TL-D Super 80

Warnings and Safety



- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Dimensional drawing


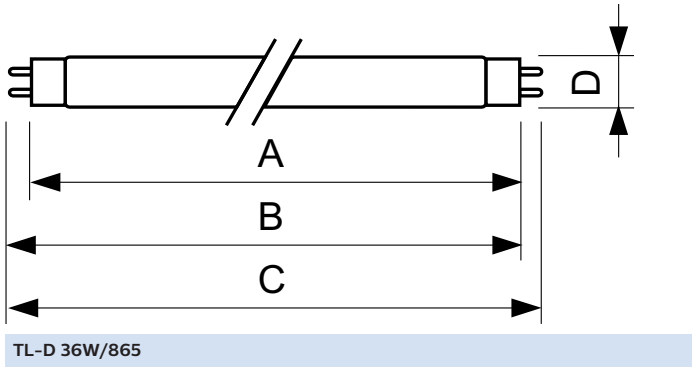


Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 36W/865 1SL/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm

Photometric data

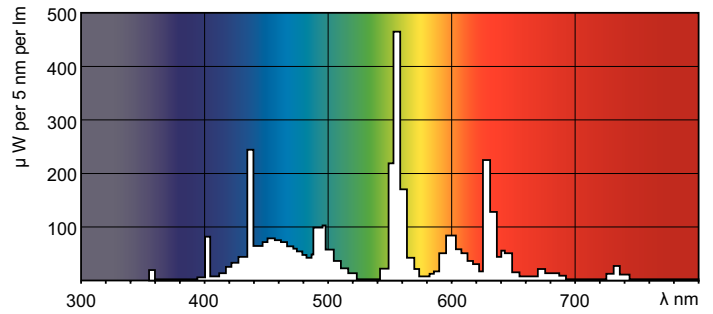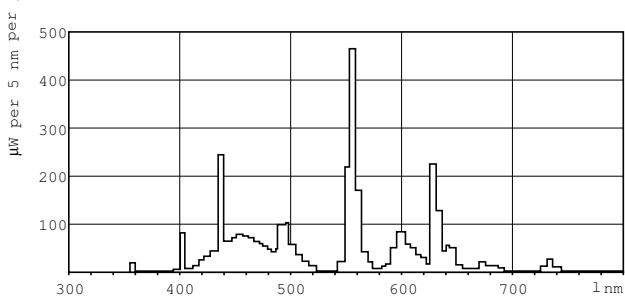

Lifetime

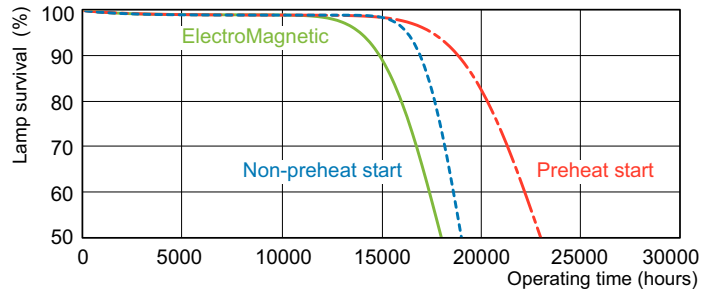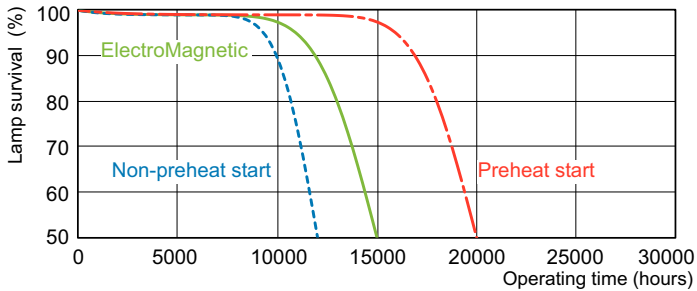

MASTER TL-D Super 80

Lifetime

