

MASTER TL5 High Output 90 De Luxe

MASTER TL5 HO 90 De Luxe 49W/940 1SL/20

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

Product data

General Information	
Cap base	G5 [G5]
Life to 50% failures preheat (nom.)	30000 h
LSF Preheat 2000 h Rated	99 %
LSF Preheat 4000 h Rated	99 %
LSF Preheat 6000 h Rated	99 %
LSF Preheat 8000 h Rated	99 %
LSF Preheat 16000 h Rated	97 %
LSF Preheat 20000 h Rated	84 %

Light Technical	
Colour code	940 [CCT of 4,000 K]
Luminous flux (nom.)	4200 lm
Luminous flux (rated) (nom.)	3725 lm
Colour designation	Cool White (CW)
Luminous efficacy (@ max. lumen, rated) (nom.)	85 lm/W
Chromaticity coordinate X (nom.)	380
Chromaticity coordinate Y (nom.)	380
Correlated colour temperature (nom.)	4000 K
Luminous efficacy (rated) (nom.)	76 lm/W
Color rendering index (nom.)	91
LLMF 2000 h Rated	96 %
LLMF 4000 h Rated	95 %

LLMF 6000 h Rated	94 %
LLMF 8000 h Rated	93 %
LLMF 12000 h Rated	92 %
LLMF 16000 h Rated	91 %
LLMF 20000 h Rated	90 %

Operating and Electrical	
Power (Rated) (Nom)	49.2 W
Lamp current (nom.)	0.255 A

Temperature	
Design temperature (nom.)	35 °C

Controls and Dimming	
Dimmable	yes

Approval and Application	
Energy efficiency label (EEL)	A
Mercury (Hg) content (nom.)	1.4 mg
Energy Consumption kWh/1000 h	54 kWh

Product Data	
Full product code	871150086897800

MASTER TL5 High Output 90 De Luxe


Order product name	MASTER TL5 HO 90 De Luxe 49W/940 1SL20
EAN/UPC – product	8711500868978
Order code	86897800
Local Code	49940
Numerator – quantity per pack	1

Numerator – packs per outer box	20
Material no. (12NC)	927991594024
Net weight (piece)	128.700 g
ILCOS Code	FDH-49/40/1A-L/P-G5-16/1450

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO 90 De Luxe 49W/940 1SL20	17 mm	1449.0 mm	1456.1 mm	1453.7 mm	1463.2 mm

TL5 HO 49W/940

Photometric data

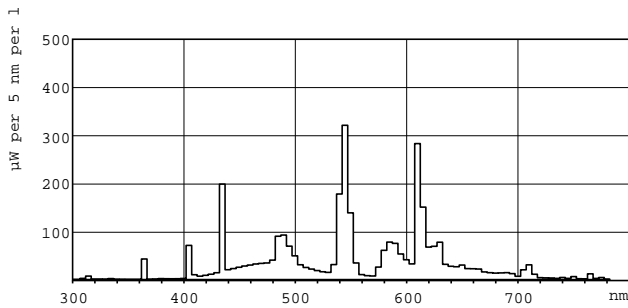

Lightcolour TL5 /940

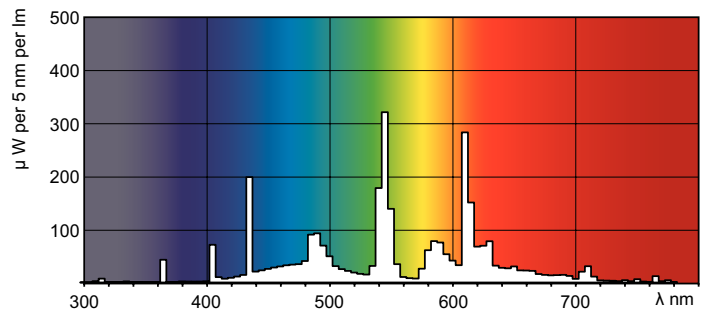

Lightcolour TL5 /940

MASTER TL5 High Output 90 De Luxe

Lifetime

