



MASTER TL5 High Output EcoPlus

MASTER TL5 HO EcoPlus 66=80W/840 UNP/40

TL5 High Output EcoPlus lamp (tube diameter 16 mm) provides extra energy savings by simple lamp-for-lamp replacement of TL5 HO Eco lamps, at the expense of slightly reduced light output. No compromises are made on the excellent TL5 lumen maintenance, lifetime and color rendering. Application areas vary from offices and industry to schools and retail environments.

Warnings and Safety

- A reduction in energy consumption is only achieved with current-controlled gear.
- The lamps operate perfectly with power-controlled gear, but in that case the light output can be up to 10% higher.
- TL5 HO EcoPlus is not designed for dimming applications.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		Color rendering index (CRI)	
Cap-Base	G5 [G5]	82	
Features	HO XEW Alto® [High Output Energy Advantage Alto]	Operating and Electrical	
		Power Consumption	63.3 W
		Lamp Current (Nom)	0.555 A
Light Technical		Controls and Dimming	
Color Code	840 [CCT of 4000K]	Dimmable	No
Luminous Flux	6,400 lm	Mechanical and Housing	
Color Designation	Cool White (CW)	Bulb Shape	T5 [16 mm (T5)]
Correlated Color Temperature (Nom)	4000 K		
Luminous Efficacy (rated) (Nom)	90 lm/W		

MASTER TL5 High Output EcoPlus

Approval and Application	
Mercury (Hg) Content (Nom)	1.4 mg
Energy Consumption kWh/1000 h	73 kWh
Product Data	
Order product name	MASTER TL5 HO EcoPlus 66=80W/840 UNP/40
Full product name	MASTER TL5 HO EcoPlus 66=80W/840 UNP/40
Full product code	871829166341600


Order code	927995684031
Material Nr. (12NC)	927995684031
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718291548140
Numerator - Packs per outer box	40
EAN/UPC - Case	8718291663416

Dimensional drawing

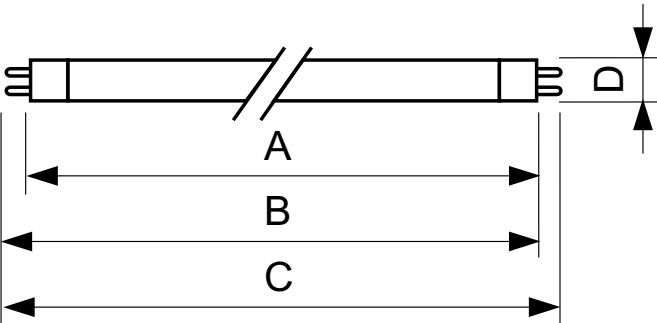


Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL5 HO EcoPlus 66=80W/840 UNP/40	17 mm	1,449.0 mm	1,456.1 mm	1,453.7 mm	1,463.2 mm

Photometric data

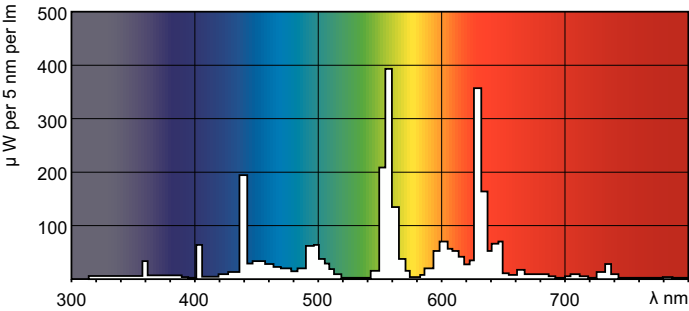



Spectral Power Distribution Colour - MASTER TL5 HO EcoPlus 66=80W/840 UNP/40

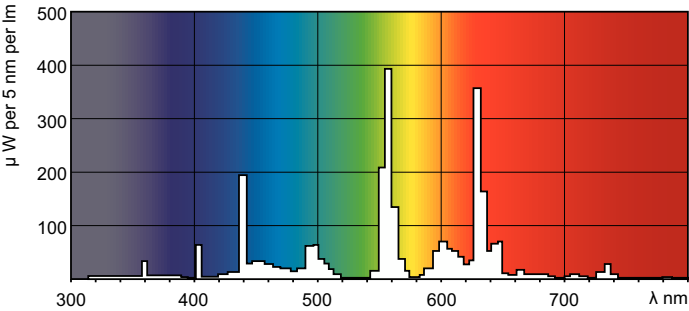

Spectral Power Distribution Colour - MASTER TL5 HO EcoPlus 66=80W/840 UNP/40


MASTER TL5 High Output EcoPlus

Lifetime

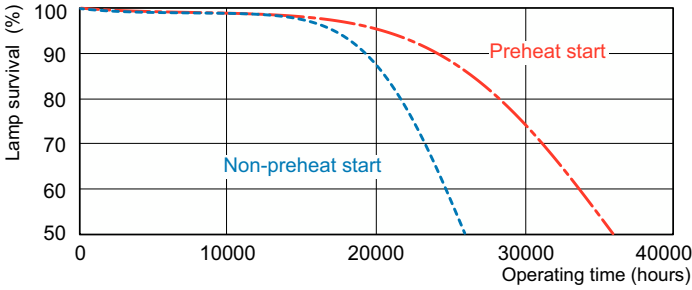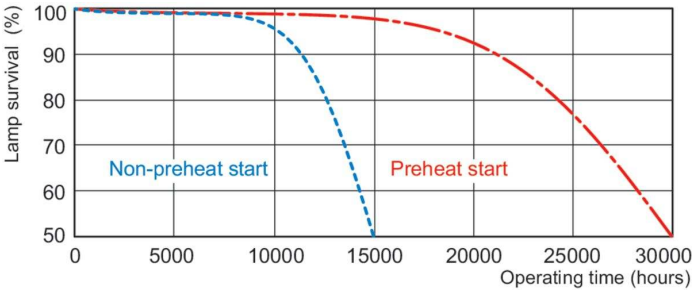

Life Expectancy Diagram - MASTER TL5 HO EcoPlus 66=80W/840 UNP/40

Life Expectancy Diagram - MASTER TL5 HO EcoPlus 66=80W/840 UNP/40

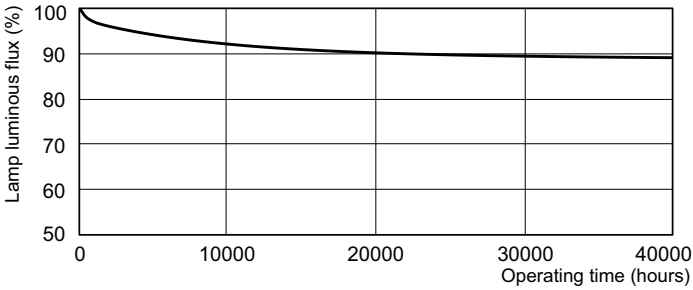

Lumen Maintenance Diagram - MASTER TL5 HO EcoPlus 66=80W/840 UNP/40

