



Actinic BL TL(-K)/TL-D(-K)

Actinic BL TL 6W/10 1FM/10X25CC

Tubular low-pressure mercury vapour fluorescent lamps

Product data

General Information	
Cap base	G5 [G5]
Main application	Reprography (R)
Life to 50% failures (nom.)	10000 h
Useful life (nom.)	5000 h
Light Technical	
Colour code	10
Colour designation	Actinic
Chromaticity coordinate X (nom.)	222
Chromaticity coordinate Y (nom.)	210
Depreciation at 500 Hours	17 %
Depreciation at 1000 Hours	25 %
Depreciation at 500 Hours	35 %
Depreciation at 500 Hours	50 %
Depreciation at 500 Hours	60 %
Operating and Electrical	
Power (Rated) (Nom)	6 W
Lamp current (nom.)	0.16 A
Voltage (Nom)	42 V


Approval and Application	
Mercury (Hg) content (nom.)	4.4 mg
UV	
UV-B/UV-A (IEC)	0.2 %
UV-A radiation 100 hours (IEC)	1.4 W
Product Data	
Full product code	871150026039027
Order product name	Actinic BL TL 6W/10 1FM/10X25CC
EAN/UPC – product	8711500260390
Order code	26039027
Local Code	610
Numerator – quantity per pack	1
Numerator – packs per outer box	250
Material no. (12NC)	928000501030
Net weight (piece)	21.000 g

Actinic BL TL(-K)/TL-D(-K)

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL 6W/10 1FM/ 10X25CC	16 mm	212.1 mm	219.2 mm	216.8 mm	226.3 mm

TL 6W/10

Photometric data

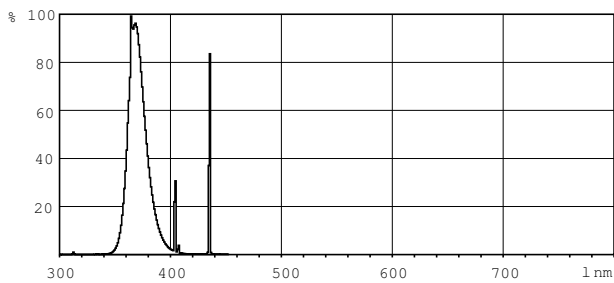

Lightcolour /10

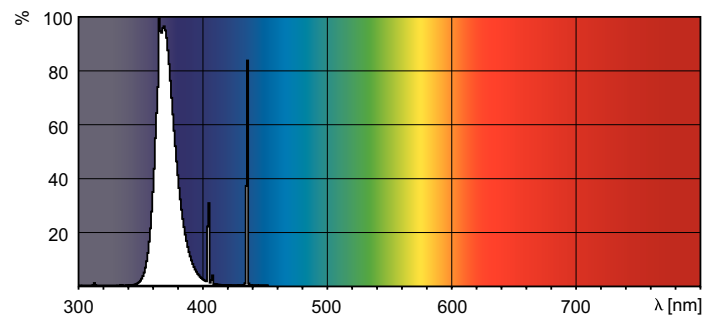

Lightcolour /10

