



# Actinic BL TL(-K)/TL-D(-K)

## ACTINIC BL 15W/10 FAM/10X25BOX

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

### Product data

General Information	
Cap base	G5 [ G5]
Useful life (max.)	1000 h
Light Technical	
Colour code	10
Colour designation	Actinic
Depreciation at 500 Hours	30 %
Depreciation at 1000 Hours	40 %
Depreciation at 500 Hours	45 %
Operating and Electrical	
Power (Rated) (Nom)	15 W
Lamp current (nom.)	0.40 A
Voltage (Nom)	43 V


UV	
UV-B/UV-A (IEC)	0.2 %
UV-A radiation 100 hours (IEC)	3 W
Product Data	
Full product code	871150095148927
Order product name	Actinic BL TL MINI 15W/10 /10X25CC
EAN/UPC – product	8711500951489
Order code	95148927
Numerator – quantity per pack	1
Numerator – packs per outer box	250
Material no. (12NC)	928001201030
Net weight (piece)	25.300 g

## Actinic BL TL(-K)/TL-D(-K)

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


### Dimensional drawing




TL 15W/10

Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL MINI 15W/10 /10X25CC	16 mm	288.3 mm	295.4 mm	293.0 mm	302.5 mm

### Photometric data

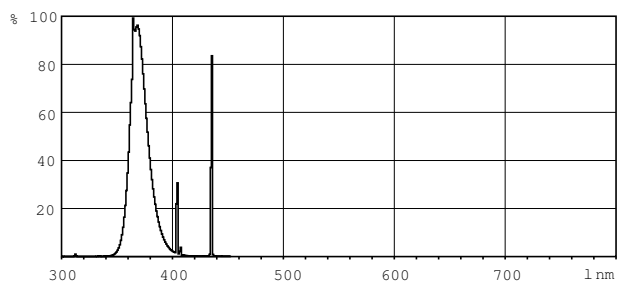

XDPB\_XUBTL\_10-Spectral power distribution B/W

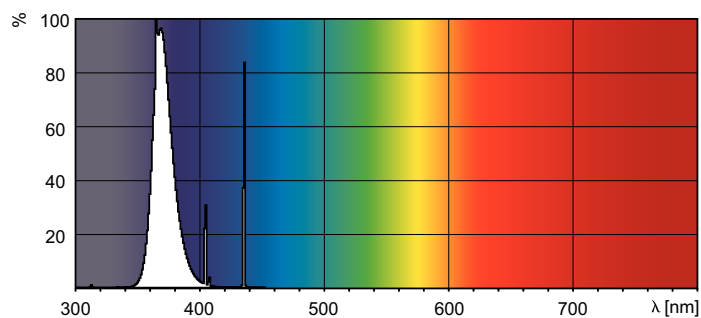

XDPO\_XUBTL\_10-Spectral power distribution Colour

