

MASTER TL Mini Super 80



MASTER TL Mini Super 80 13W/830 1FM/10X25CC

Low-pressure mercury discharge lamps with a tubular 16 mm envelope

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap base	G5 [G5]
Flux measurement reference	Sphere
Life to 50% failures (nom.)	8,000 h
Light Technical	
Colour Code	830 [CCT of 3000K]
Luminous Flux	1,000 lm
Colour designation	Warm White (WW)
Chromaticity Coordinate X (Nom)	0.44
Chromaticity Coordinate Y (Nom)	0.403
Correlated Colour Temperature	3000 K
Luminous efficacy (rated) (nom.)	77 lm/W
Colour rendering index (CRI)	82
Operating and Electrical	
Power Consumption	13.1 W
Lamp current (nom.)	0.170 A
Voltage (nom.)	90 V


Voltage (nom.)	90 V
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb shape	T5 [16 mm (T5)]
Approval and Application	
Energy Efficiency Class	G
Mercury (Hg) content (max.)	2.5 mg
Mercury (Hg) content (nom.)	3.0 mg
Energy consumption kWh/1,000 hours	14 kWh
EPREL registration number	423502
Product Data	
Order product name	MST TL Mini 13W/830 FAM/10X25BOX
Full product name	MASTER TL Mini Super 80 13W/830 1FM/10X25CC

MASTER TL Mini Super 80

Full EOC	871150071681127
Order code	71681127
Material no. (12 NC)	928001508350
Local order code	13830
SAP numerator – quantity per pack	1


EAN/UPC – Product/Case	8711500716811
Numerator – packs per outer box	250
EAN/UPC – Case	8711500716835

Dimensional drawing

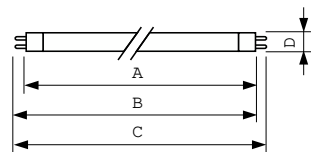

Product	D (max)	A (max)	B (max)	B (min)	C (max)
MST TL Mini 13W/830 FAM/ 10X25BOX	16 mm	516.9 mm	524.0 mm	521.6 mm	531.1 mm

Photometric data

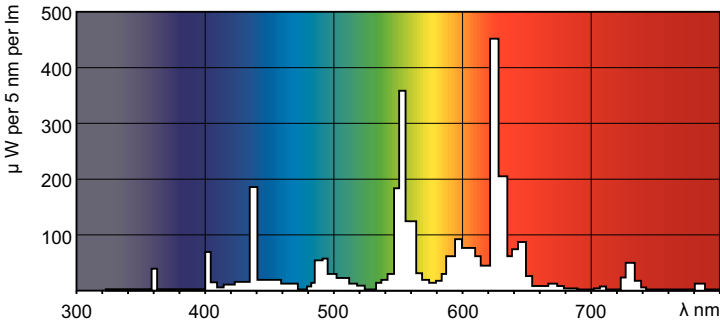

Spectral Power Distribution Colour – MST TL Mini 13W/830 FAM/10X25BOX

