



UVB Broadband TL

TL 20W/12 RS SLV/25

The UVB Broadband TL lamps emit radiation in the 'B' bandwidth of the UV spectrum (290 to 315 nm) and are therefore suitable for phototherapy systems designed to treat skin diseases such as psoriasis.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Lamp contains mercury.
- Manage in Accord with Disposal Laws.
- See: www.lamprecycle.org or 1-800-555-0050

Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Life to 50% Failures (Nom)	1,000 hour(s)
Useful Life (Nom)	1,000 hour(s)
Light Technical	
Color Code	12
Color Designation	Ultra Violet B
Chromaticity Coordinate X (Nom)	226
Chromaticity Coordinate Y (Nom)	220
UV Depreciation at 1000 h	15 %
UV Depreciation at 500 h	10 %
Operating and Electrical	
Power Consumption	19.3 W
Lamp Current (Nom)	0.37 A

Voltage (Nom)	59 V
Voltage (Nom)	59 V
Mechanical and Housing	
Bulb Shape	T38 [T 38mm]
UV	
UV-B Radiation 100 hr (IEC)	2.3 W
UV-B Radiation 5hr (IEC)	2.4 W
Product Data	
Order product name	TL 20W/12 RS SLV/25
Full product name	TL 20W/12 RS SLV/25
Full product code	871869666243400
Order code	323238
Material Nr. (12NC)	928010001230


UVB Broadband TL

Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696662434
Numerator - Packs per outer box	25


EAN/UPC - Case	8718696662441
----------------	---------------

Dimensional drawing

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL 20W/12 RS SLV/25	1-5/8 inch	23-1/4 inch	23-1/2 inch	23-7/16 inch	23-13/16 inch



Photometric data

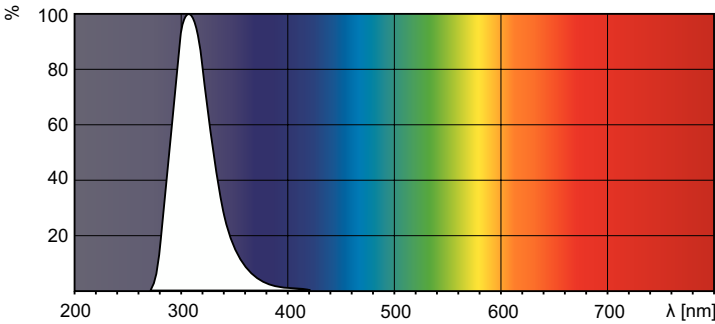

Spectral Power Distribution Colour - TL 20W/12 RS SLV/25

