



# Actinic BL TL(-K)/TL-D(-K)

## Actinic BL TL-DK 30W/10

With an optimized spectrum matching the eye sensitivity of the housefly, Actinic BL TL(-K)/TL-D(-K)/TL-E/PL-S and PL-L lamps are perfect for attracting insects. They have virtually no UV-B output, and so are perfectly safe. What's more, with the lowest mercury content in the industry and being 100% lead-free, these lamps represent a very good environmental choice. Furthermore, the availability of a wide range of form factors (straight (T5, T8, T12), circular (TL-E) and compact (PL-S/PL-L)) and wattages enables you to make all kinds of designs for your electronic fly killers.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data


General Information		UV Depreciation at 2,000 h	
Cap base	G13 [ Medium Bi-Pin Fluorescent]		40 %
Main application	Insect traps	Operating and Electrical	
Life to 50% failures (nom.)	2000 h	Power (Rated) (Nom)	30 W
Useful life (nom.)	2000 h	Lamp current (nom.)	0.805 A
		Voltage (Nom)	45 V
Light Technical		Approval and Application	
Colour Code	10	Mercury (Hg) content (nom.)	8.0 mg
Colour designation	Actinic	UV	
Chromaticity coordinate X (nom.)	225	UV-B/UV-A (IEC)	02 %
Chromaticity coordinate Y (nom.)	230		
UV depreciation at 500 hours	15 %		
Depreciation at 1000 Hours	25 %		

## Actinic BL TL(-K)/TL-D(-K)

UV-A radiation 100 hours (IEC)	6.6 W
<b>Product Data</b>	
Full product code	871150089346840
Order product name	ACTINIC BL TL-DK - 30W/10 1SL
EAN/UPC – product	8711500893468
Order code	89346840

Numerator – quantity per pack	1
SAP numerator – packs per outer box	25
Material no. (12 NC)	928019501029
SAP net weight (piece)	59.600 g

### Dimensional drawing




#### Product


ACTINIC BL TL-DK - 30W/10 1SL

TL-DK 30W/10

### Photometric data

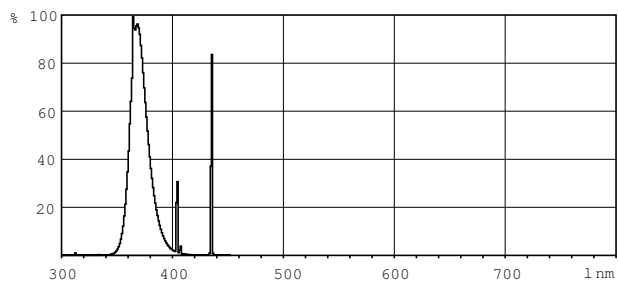

XDPB\_XUATLDK\_10-Spectral power distribution B/W

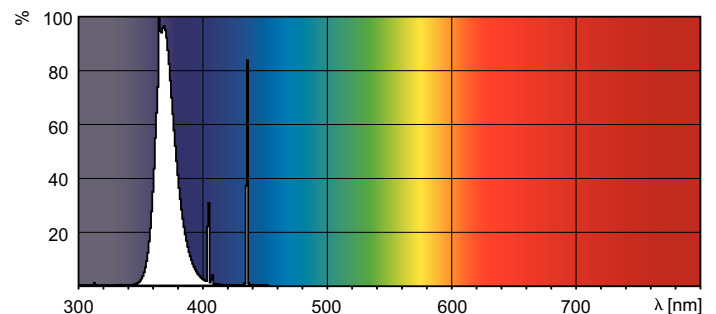

XDPO\_XUATLDK\_10-Spectral power distribution Colour

