



# Retail Sales T8

## F15T8 BRIGHT WHITE/18 ALTO SL6


Energy Savings, extra long life, extra low mercury. T8 lamps offer high energy savings, superior lumen output, and long life in an environmentally responsible lamp.

### Product data

General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Features	ALTO® (ALTO)
Life to 50% Failures (Nom)	13,000 hour(s)
Light Technical	
Color Code	830 [CCT of 3000K]
Luminous Flux	990 lm
Color Designation	Soft White
Correlated Color Temperature (Nom)	3000 K
Color rendering index (CRI)	83
Operating and Electrical	
Power Consumption	15 W
Lamp Current (Nom)	0.335 A
Wattage Equivalent	15 W
Voltage (Nom)	55 V
Voltage (Nom)	55 V
Controls and Dimming	
Dimmable	Yes



Mechanical and Housing	
Bulb Shape	T8
Approval and Application	
Mercury (Hg) Content (Nom)	2.0 mg
Product Data	
Order product name	F15T8 BRIGHT WHITE/18 ALTO SL6
Full product name	F15T8 BRIGHT WHITE/18 ALTO SL6
Order code	928022883028
Material Nr. (12NC)	928022883028
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	046677392123
Numerator - Packs per outer box	6
EAN/UPC - Case	50046677392128

Dimensional drawing

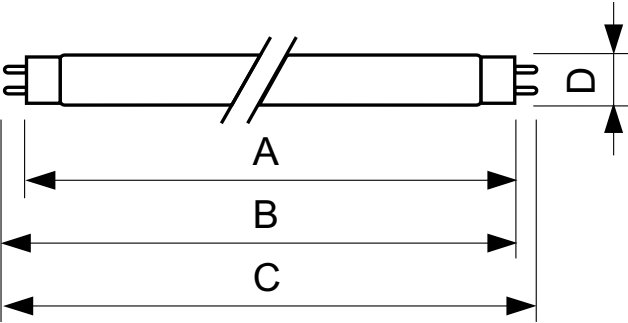


Product	D (max)	A (max)	B (max)	B (min)	C (max)
F15T8 BRIGHT WHITE/18 ALTO SL6	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm

Lifetime

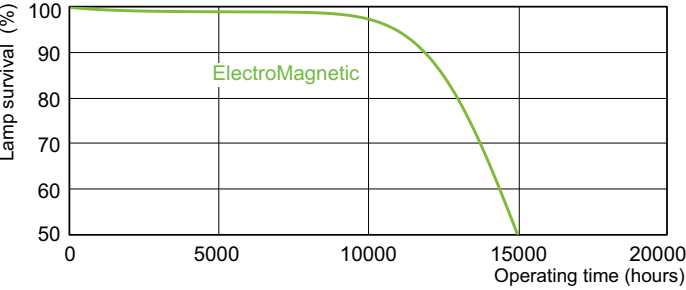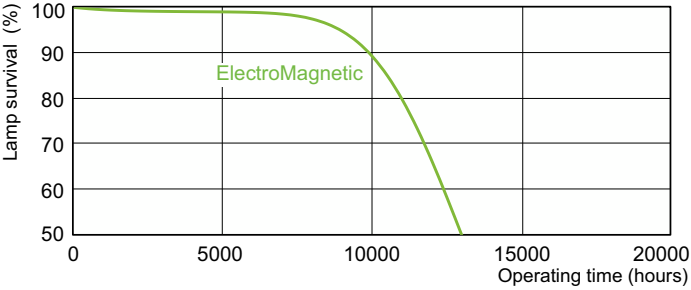

Life Expectancy Diagram - F15T8 BRIGHT WHITE/18 ALTO SL6

Life Expectancy Diagram - F15T8 BRIGHT WHITE/18 ALTO SL6

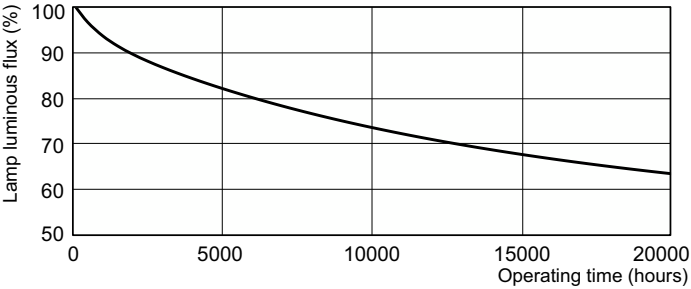

Lumen Maintenance Diagram - F15T8 BRIGHT WHITE/18 ALTO SL6

