



Actinic BL TL(-K) / TL-D(-K)

Actinic BL TL-D 15W/10 1SL/25

Tubular low-pressure mercury vapour fluorescent lamps

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Life to 50% Failures (Nom)	8,000 hour(s)
Useful Life (Nom)	9,000 hour(s)
Light Technical	
Color Code	10
Color Designation	Actinic
Chromaticity Coordinate X (Nom)	222
Chromaticity Coordinate Y (Nom)	210
UV Depreciation at 2000 h	10 %
UV Depreciation at 5000 h	15 %
UV Depreciation at 8000 h	20 %
Operating and Electrical	
Power Consumption	15 W
Lamp Current (Nom)	0.34 A
Voltage (Nom)	55 V

Voltage (Nom)	55 V
Mechanical and Housing	
Bulb Shape	T26
Approval and Application	
Mercury (Hg) Content (Nom)	5.0 mg
UV	
UV-A Radiation 100Hr (IEC)	3.9 W
Product Data	
Order product name	Actinic BL TL-D 15W/10 1SL/25
Full product name	Actinic BL TL-D 15W/10 1SL/25
Full product code	871150071093240
Order code	928024801029
Material Nr. (12NC)	928024801029
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500710932

Actinic BL TL(-K) / TL-D(-K)


Numerator - Packs per outer box	25
EAN/UPC - Case	8711500710949

Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL-D 15W/10 1SL/25	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm

Photometric data

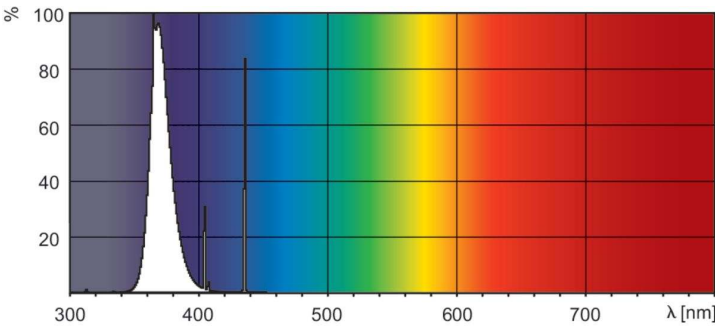

Spectral Power Distribution Colour - Actinic BL TL-D 15W/10 1SL/25

