



TL-D Standard Colours

TL-D 15W/33-640 1SL/9

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

Product data

General Information	
Cap base	G13 [Medium Bi-Pin Fluorescent]
Life to 50% failures (nom.)	13000 h
Life to 50% failures preheat (nom.)	20000 h
Light Technical	
Colour Code	33-640
Lamp Luminous Flux 25°C EL (Nom)	830 lm
Colour Designation	Cool White (CW)
Lumen maintenance 10,000 hours (nom.)	75 %
Lumen maintenance 2,000 hours (nom.)	90 %
Lumen maintenance 5,000 hours (nom.)	80 %
Colour Temperature, horizontal (Nom)	4100 K
Colour Rendering Index,horiz (Nom)	63
Operating and Electrical	
Power (Rated) (Nom)	15.0 W
Lamp current (nom.)	0.310 A
Voltage (Nom)	51 V


Controls and Dimming	
Dimmable	yes
Approval and Application	
Energy efficiency label (EEL)	B
Mercury (Hg) content (nom.)	8.0 mg
Product Data	
Full product code	871150070277700
Order product name	TL-D 15W/33-640 1SL/9
EAN/UPC – product	8711500702777
Order code	928024803347
Local Code	TLD15W33
Numerator – quantity per pack	1
Numerator – packs per outer box	9
Material no. (12NC)	928024803347
Net weight (piece)	0.077 kg
ILCOS Code	FD-15/41/2B-E-G13

TL-D Standard Colours

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing

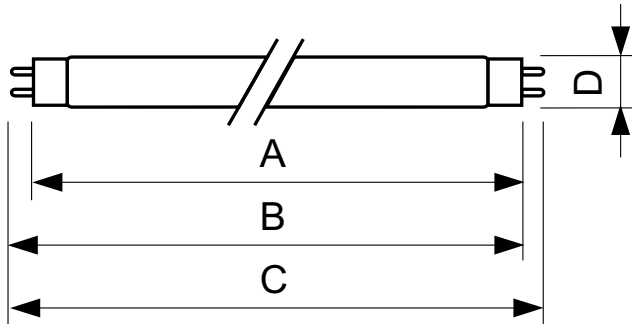


TL-D 15W/33-640

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 15W/33-640 1SL/9	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm

Photometric data


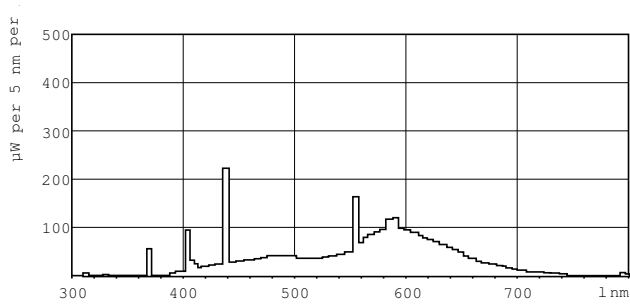


Lightcolour /33-640

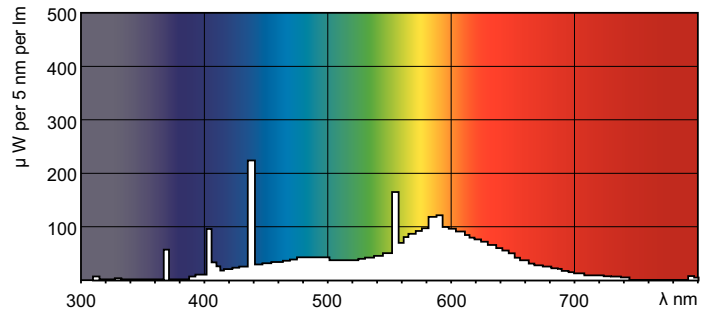

Lightcolour /33-640

Lifetime

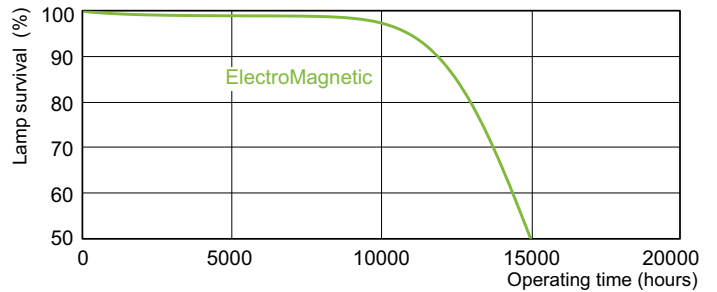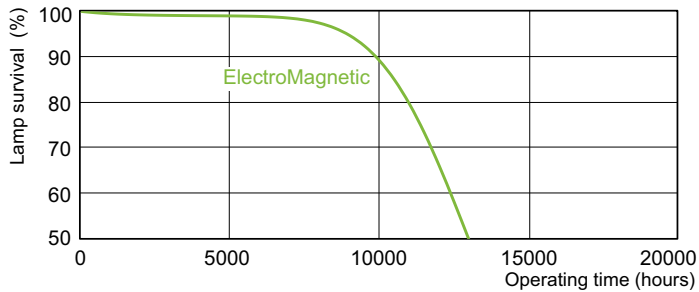

TL-D Standard Colours

Lifetime

