



# TL-D Standard Colours

## TL-D 30W/54-765 1SL/25

TL-D Standard Colors lamps (tube diameter of 26 mm) create atmospheres from warm white to cool daylight. Lamps with moderate efficacy and color rendering.

### Product data

General Information	
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]
Life To 10% Failures (Nom)	10000 h
Life to 50% Failures (Nom)	13000 h

Light Technical	
Color Code	54-765
Luminous Flux (Nom)	1825 lm
Color Designation	Cool Daylight
Lumen Maintenance 10000 h (Nom)	75 %
Lumen Maintenance 2000 h (Nom)	90 %
Lumen Maintenance 5000 h (Nom)	80 %
Correlated Color Temperature (Nom)	6200 K
Color Rendering Index (Nom)	72

Operating and Electrical	
Power (Rated) (Nom)	30.0 W
Lamp Current (Nom)	0.360 A
Voltage (Nom)	98 V

Controls and Dimming	
Dimmable	Yes

Approval and Application	
Energy Efficiency Label (EEL)	B
Mercury (Hg) Content (Nom)	8.0 mg
Energy Consumption kWh/1000 h	36 kWh


Product Data	
Full product code	871869648774700
Order product name	TL-D 30W/54-765 1SL/25
EAN/UPC - Product	8718696487747
Order code	928025405451
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928025405451
Net Weight (Piece)	148.900 g
ILCOS Code	FD-30/62/2A-E-G13

## TL-D Standard Colours

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


### Dimensional drawing

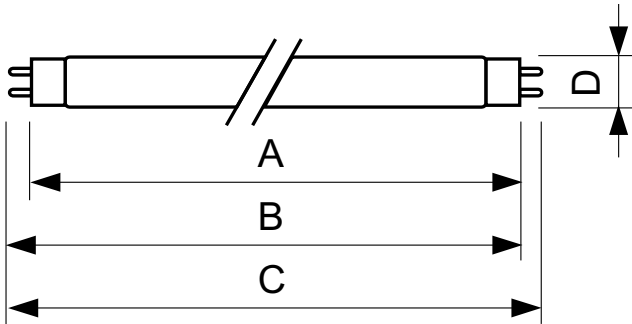


TL-D 30W/54-765

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 30W/54-765 1SL/25	28 mm	894.6 mm	901.7 mm	899.3 mm	908.8 mm

### Photometric data

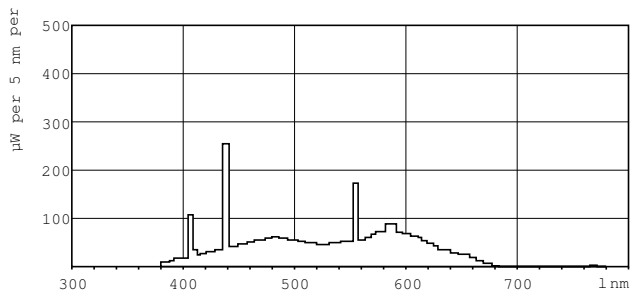


Lightcolor /54-765

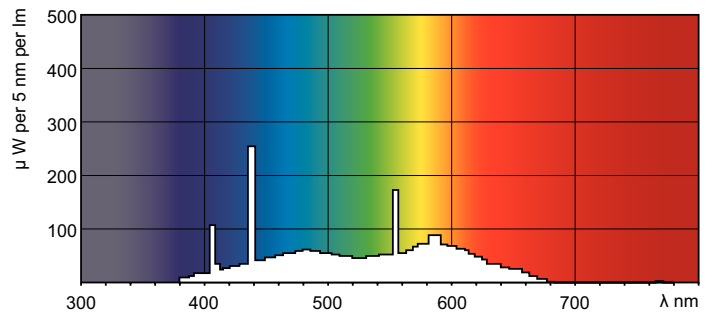


Lightcolor /54-765

### Lifetime

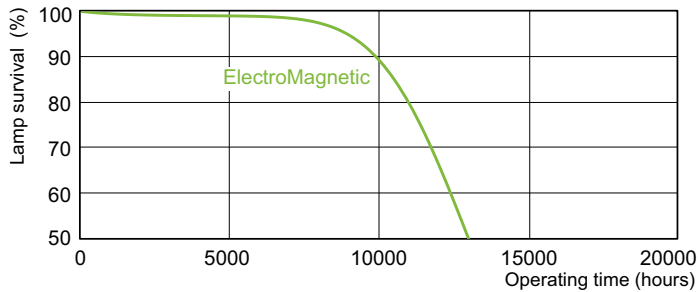

TL-D Standard Colours Life Expectancy 3 h cycle

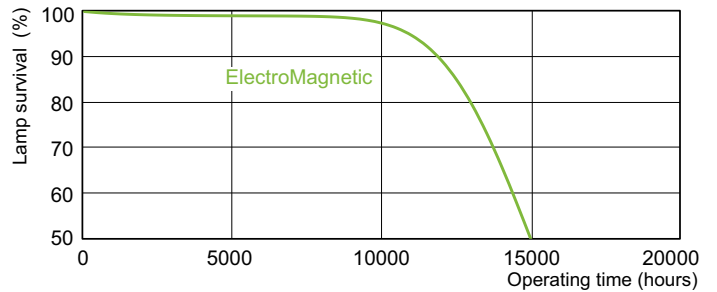

TL-D Standard Colours Life Expectancy 12 h cycle

## TL-D Standard Colours

### Lifetime



TL-D Standard Colours Lumen Maintenance 3 h + 12 h cycle

