



Actinic BL TL-E

Actinic BL TL-E 22W/10 1CT/20

Circular low-pressure mercury vapour fluorescent lamps

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information	
Cap-Base	G10q
Life to 50% Failures (Nom)	9,000 hour(s)
Useful Life (Nom)	4,000 hour(s)
Light Technical	
Color Code	10
Color Designation	Ultra Violet A
UV Depreciation at 2000 h	15 %
UV Depreciation at 5000 h	25 %
Operating and Electrical	
Power Consumption	22 W
Lamp Current (Nom)	0.4 A
Voltage (Nom)	62 V
Voltage (Nom)	62 V

Mechanical and Housing	
Bulb Shape	C-T29
Approval and Application	
Mercury (Hg) Content (Nom)	8 mg
UV	
UV-A Radiation 100Hr (IEC)	3.1 W
Product Data	
Order product name	Actinic BL TL-E 22W/10 1CT/20
Full product name	Actinic BL TL-E 22W/10 1CT/20
Full product code	871150028513305
Order code	928026201005
Material Nr. (12NC)	928026201005
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500285133
Numerator - Packs per outer box	20

Actinic BL TL-E


EAN/UPC - Case	8711500285157
----------------	---------------

Dimensional drawing



Product	D (max)	D (min)	F (max)	F (min)	E (min)	E (max)
Actinic BL TL-E 22W/10 1CT/20	30.9 mm	26.2 mm	155.6 mm	149.1 mm	205.0 mm	213.5 mm

Photometric data

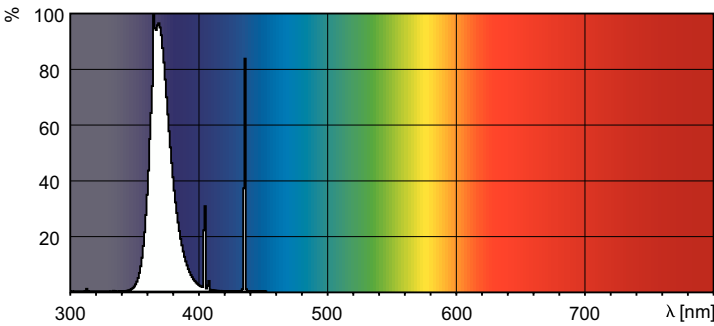

Spectral Power Distribution Colour - Actinic BL TL-E 22W/10 1CT/20

