



# TL-E Circular Standard Colours

## TL-E 32W/33-640 1CT/12

This circular TL lamp (tube diameter 29 mm) enables omni-directional light distribution. It is suitable for use in a wide range of luminaires for various purposes where color rendering is not important.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data


General Information		Voltage (Nom)	
Cap-Base	G10q	81 V	
Life to 50% Failures (Nom)	13,000 hour(s)	Controls and Dimming	
<b>Light Technical</b>		Dimmable	Yes
Color Code	33-640	Mechanical and Housing	
Luminous Flux	2,050 lm	Bulb Shape	C-T29
Color Designation	Cool White (CW)	Approval and Application	
Correlated Color Temperature (Nom)	4100 K	Mercury (Hg) Content (Nom)	9 mg
Luminous Efficacy (rated) (Nom)	64 lm/W	Product Data	
Color rendering index (CRI)	63	Order product name	TL-E 32W/33-640 1CT/12
Operating and Electrical		Full product name	TL-E 32W/33-640 1CT/12
Power Consumption	32.0 W	Full product code	871150055956215
Lamp Current (Nom)	0.450 A	Order code	928026303360
Voltage (Nom)	81 V	Material Nr. (12NC)	928026303360

## TL-E Circular Standard Colours

Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500559562
Numerator - Packs per outer box	12


EAN/UPC - Case	8711500559371
----------------	---------------

### Dimensional drawing

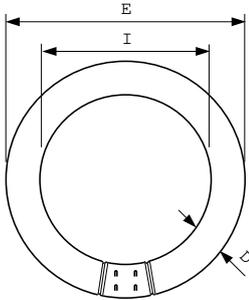

Product	D (max)	D (min)	E (min)	E (max)	I (min)	I (max)
TL-E 32W/33-640 1CT/12	30.9 mm	27.1 mm	299.0 mm	303.5 mm	241.0 mm	246.0 mm

### Photometric data

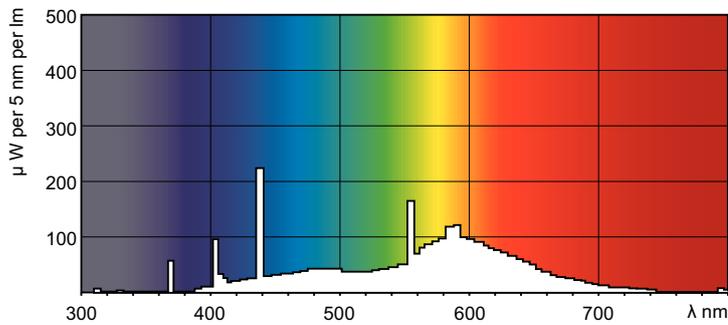

Spectral Power Distribution Colour - TL-E 32W/33-640 1CT/12

