



# TL-E LIFEMAX

## Standard Colours

### TL-E 32W/54-765 1CT/20


This circular TL lamp (tube diameter 29 mm) enables omni-directional light distribution. It is suitable for use in a wide range of luminaires for various purposes where color rendering is not important.

#### Product data

General Information		Mechanical and Housing	
Cap-Base	G10Q [ G10q]	Bulb Shape	C-T9 [ C-T9 29 mm]
Life to 50% Failures (Nom)	13000 h		
Light Technical		Approval and Application	
Color Code	54-765	Mercury (Hg) Content (Nom)	9 mg
Luminous Flux (Nom)	1750 lm	Product Data	
Color Designation	Cool Daylight	Full product code	871150063387301
Lumen Maintenance 10000 h (Nom)	73 %	Order product name	TL-E 32W/54-765 1CT/20
Lumen Maintenance 2000 h (Nom)	83 %	EAN/UPC - Product	8711500633873
Lumen Maintenance 5000 h (Nom)	74 %	Order code	928026305436
Correlated Color Temperature (Nom)	6200 K	Numerator - Quantity Per Pack	1
Luminous Efficacy (rated) (Nom)	57 lm/W	Numerator - Packs per outer box	20
Color Rendering Index (Nom)	72	Material Nr. (12NC)	928026305436
Operating and Electrical		Net Weight (Piece)	0.180 kg
Power (Nom)	32.0 W	ILCOS Code	FSC-32/62/2A-E-G10q-29/299
Lamp Current (Nom)	0.450 A		
Voltage (Nom)	81 V		
Controls and Dimming			
Dimmable	Yes		

# TL-E LIFEMAX Standard Colours


## Dimensional drawing




Product	D (max)	D (min)	E (min)	E (max)	I (min)	I (max)
TL-E 32W/ 54-765 1CT/20	30.9 mm	27.1 mm	299.0 mm	303.5 mm	241.0 mm	246.0 mm

TL-E 32W/54-765

## Photometric data

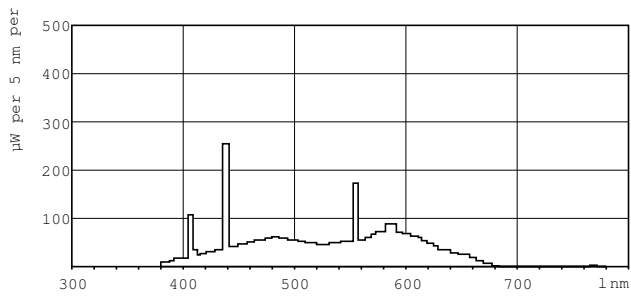

LDPB\_TL-ESTD\_54-765-Spectral power distribution B/W

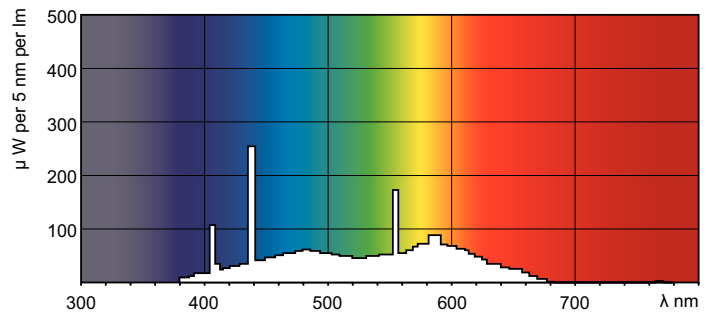

LDPO\_TL-ESTD\_54-765-Spectral power distribution Colour

