



UV-B Narrowband TL

TL 100W/01 SLV/10

More than 400 independent clinical studies have proven that the UVB Narrowband treatment is safer and more effective than any other treatment in its class. Lamps installed in such phototherapy treatment systems emit only a very narrow waveband from the 'B' bandwidth of the UV spectrum (290 to 315). Philips offers lamps with narrow waveband of between 305 and 315 nm which peaks at 311 nm. This makes these lamps very suitable for Clinical and Home UV-B Narrowband phototherapy systems which treat skin diseases such as psoriasis and vitiligo. N.B.: Our UVB lamps are NOT registered with FDA as medical devices as they are NOT packaged or labeled for commercial distribution for health-related purposes. US customers are referred to the UVB and UVA lamp range brochure US version.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data


General Information		UV Depreciation at 500 h	
Cap-Base	R17D [R17d (RDC)]		10 %
Life to 50% Failures (Nom)	1,000 hour(s)	Operating and Electrical	
Useful Life (Nom)	1,000 hour(s)	Power Consumption	100 W
Light Technical		Lamp Current (Nom)	0.97 A
Color Code	01	Voltage (Nom)	126 V
Color Designation	Ultra Violet B	Voltage (Nom)	126 V
Chromaticity Coordinate X (Nom)	216	Mechanical and Housing	
Chromaticity Coordinate Y (Nom)	208	Bulb Shape	T38 [T 38mm]
UV Depreciation at 1000 h	15 %		

UV-B Narrowband TL

Approval and Application	
Mercury (Hg) Content (Nom)	14.0 mg
UV	
UV-B Radiation 100 hr (IEC)	16.1 W
UV-B Radiation 5hr (IEC)	18.4 W
Product Data	
Order product name	TL 100W/01 SLV/10
Full product name	TL 100W/01 SLV/10


Full product code	871869666233500
Order code	323188
Material Nr. (12NC)	928034900130
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696662335
Numerator - Packs per outer box	10
EAN/UPC - Case	8718696662342

Dimensional drawing

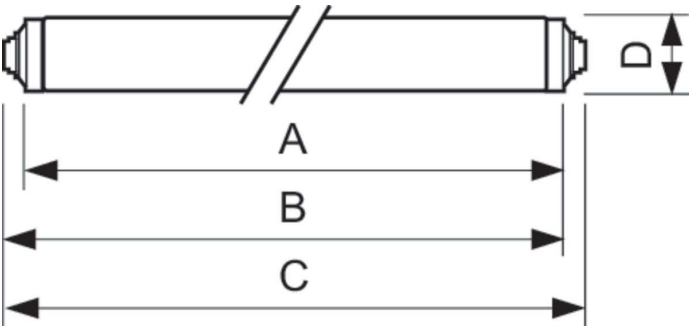

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL 100W/01 SLV/10	40.5 mm	1,763.8 mm	1,770.9 mm	1,768.5 mm	1,782.2 mm

Photometric data

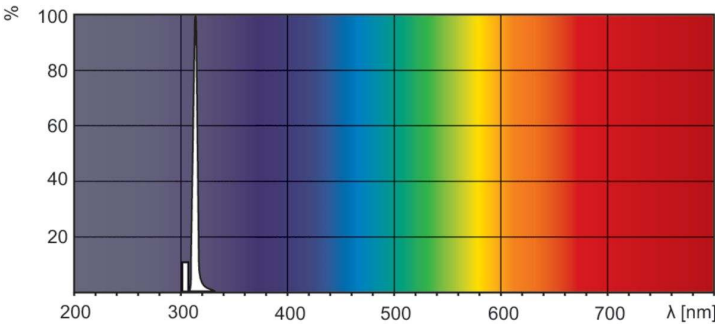

Spectral Power Distribution Colour - TL 100W/01 SLV/10

