



Actinic BL TL(-K)/TL-D(-K)

Actinic BL TL-D 18W/10 1SL/25

Tubular low-pressure mercury vapour fluorescent lamps

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Product data

General Information		Voltage (nom.)		59 V
Cap base	G13 [Medium Bi-Pin Fluorescent]	Mechanical and Housing		
Life to 50% failures (nom.)	13,000 h	Bulb shape	T26 [T 26 mm]	
Useful life (nom.)	9,000 h	Approval and Application		
Light Technical		Mercury (Hg) content (nom.)	5.0 mg	
Colour Code	10	UV		
Colour designation	Actinic	UV-A radiation 100 hours (IEC)	5.0 W	
Chromaticity Coordinate X (Nom)	222	Product Data		
Chromaticity Coordinate Y (Nom)	210	Order product name	Actinic BL TL-D 18W/10 1SL/25	
UV depreciation at 2,000 h	8 %	Full product name	Actinic BL TL-D 18W/10 1SL/25	
UV Depreciation at 5,000 h	12 %	Full EOC	871150026325440	
UV depreciation at 8000 hours	16 %	Order code	26325440	
Operating and Electrical		Material no. (12 NC)	928048001003	
Power Consumption	18 W	Local order code	TLD1810	
Lamp current (nom.)	0.36 A	SAP numerator – quantity per pack	1	
Voltage (nom.)	59 V			

Actinic BL TL(-K)/TL-D(-K)


EAN/UPC — Product/Case	8711500263254
Numerator – packs per outer box	25
EAN/UPC – Case	8711500263261

Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL-D 18W/10 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm

Photometric data

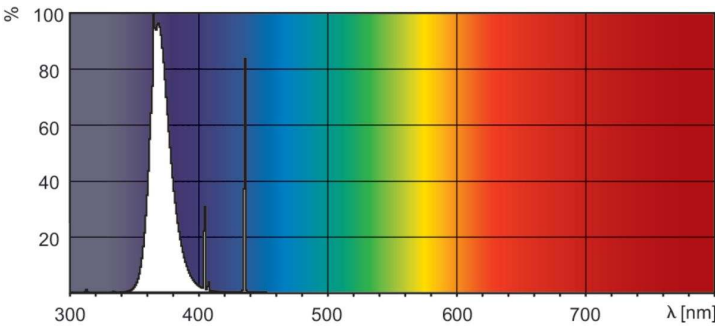

Spectral Power Distribution Colour - Actinic BL TL-D 18W/10 1SL/25

