



TL-D Standard Colours

TL-D 18W/54-765 1SL/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information			
Cap-Base	G13 [Medium Bi-Pin Fluorescent]		
Nominal lifetime	13,000 hour(s)		
Life to 50% Failures (Nom)	13,000 hour(s)		
Light Technical			
Color Code	54-765		
Luminous Flux	1,050 lm		
Color Designation	Cool Daylight		
Correlated Color Temperature (Nom)	6200 K		
Color rendering index (CRI)	72		
Operating and Electrical			
Power Consumption	18.0 W		
Lamp Current (Nom)	0.360 A		
Voltage (Nom)	59 V		

Voltage (Nom)	59 V				
Controls and Dimming					
Dimmable	Yes				
Mechanical and Housing					
Bulb Shape	Т8				
Approval and Application					
Mercury (Hg) Content (Nom)	8.0 mg				
Energy Consumption kWh/1000 h	22 kWh				
Product Data					
Order product name	TL-D 18W/54-765 1SL/25				
Full product name	TL-D 18W/54-765 1SL/25				
Full product code	871150070267840				


Datasheet, 2023, April 15 data subject to change

TL-D Standard Colours

Order code	928048005436
Material Nr. (12NC)	928048005436
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500702678


Numerator - Packs per outer box	25
EAN/UPC - Case	8711500727145

Dimensional drawing

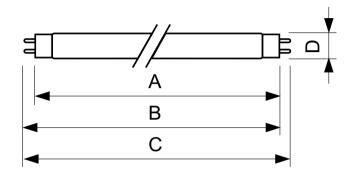


Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D 18W/54-765 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604 mm


Photometric data

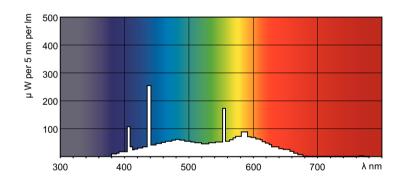

Spectral Power Distribution Colour - TL-D 18W/54-765 1SL/25

Lifetime

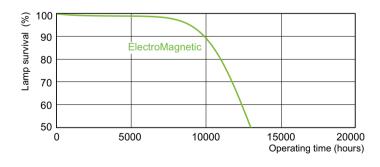




Life Expectancy Diagram - TL-D 18W/54-765 1SL/25

Life Expectancy Diagram - TL-D 18W/54-765 1SL/25

TL-D Standard Colours

Lifetime

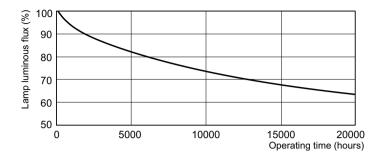

Lumen Maintenance Diagram - TL-D 18W/54-765 1SL/25

