



TL-D Colored

TL-D Colored 36W Yellow 1SL/25

This TL-D lamp (tube diameter 26 mm) helps to create special effects and atmospheres or attract attention by using red, green, blue and yellow light. Apart from using the specific colors, it is also possible to mix the colors to create white light. This lamp offers a high light output, thanks to the use of basic powders. Application areas include shops and showrooms, bars and restaurants, demonstration areas, sign lighting and entertainment stores.

Warnings and Safety

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

| General Information | | | | |
|----------------------------|---------------------------------|--|--|--|
| Cap-Base | G13 [Medium Bi-Pin Fluorescent] | | | |
| Life to 50% Failures (Nom) | 15,000 hour(s) | | | |
| | | | | |
| Light Technical | | | | |
| Color Code | 160 | | | |
| Luminous Flux | 1,580 lm | | | |
| Color Designation | Yellow | | | |
| | | | | |
| Operating and Electrical | | | | |
| Power Consumption | 36.0 W | | | |
| Lamp Current (Nom) | 0.440 A | | | |
| Voltage (Nom) | 103 V | | | |
| Voltage (Nom) | 103 V | | | |
| | | | | |

| Controls and Dimming | | | | | |
|-------------------------------|--------------------------------|--|--|--|--|
| Dimmable | Yes | | | | |
| | | | | | |
| Mechanical and Housing | | | | | |
| Bulb Shape | Т8 | | | | |
| | | | | | |
| Approval and Application | | | | | |
| Mercury (Hg) Content (Nom) | 13.0 mg | | | | |
| Energy Consumption kWh/1000 h | 44 kWh | | | | |
| | | | | | |
| Product Data | | | | | |
| Order product name | TL-D Colored 36W Yellow 1SL/25 | | | | |
| Full product name | TL-D Colored 36W Yellow 1SL/25 | | | | |
| Full product code | 871150072751040 | | | | |
| Order code | 72751040 | | | | |
| Material Nr. (12NC) | 928048501605 | | | | |


Datasheet, 2023, April 14 data subject to change

TL-D Colored

| Numerator - Quantity Per Pack | 1 |
|---------------------------------|---------------|
| EAN/UPC - Product/Case | 8711500727510 |
| Numerator - Packs per outer box | 25 |


| EAN/UPC - Case | 8711500727527 |
|----------------|---------------|
|----------------|---------------|

Dimensional drawing

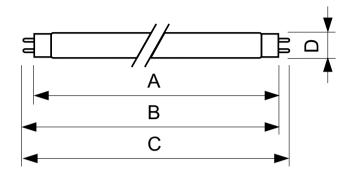

| Product | D (max) | A (max) | B (max) | B (min) | C (max) |
|-------------------------|---------|------------|------------|------------|------------|
| TL-D Colored 36W Yellow | 28.0 mm | 1,199.4 mm | 1,206.5 mm | 1,204.1 mm | 1,213.6 mm |
| 1SL/25 | | | | | |

Photometric data

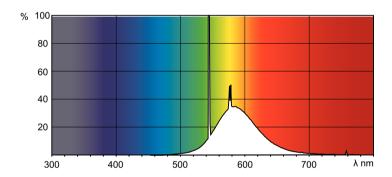

Spectral Power Distribution Colour - TL-D Colored 36W Yellow 1SL/25



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.