



# TL-D Colored

## TL-D Colored 36W Green 1SL/25

This TL-D lamp (tube diameter 26 mm) helps to create special effects and atmospheres or attract attention by using red, green, blue and yellow light. Apart from using the specific colors, it is also possible to mix the colors to create white light. This lamp offers a high light output, thanks to the use of basic powders. Application areas include shops and showrooms, bars and restaurants, demonstration areas, sign lighting and entertainment stores.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data


General Information		Voltage (Nom)	
Cap base	G13 [ Medium Bi-Pin Fluorescent]	103 V	
Life to 10% failures (nom.)	12000 h	Temperature	
Life to 50% failures (nom.)	15000 h	Design temperature (nom.)	25 °C
Life to 50% failures preheat (nom.)	20000 h	Controls and Dimming	
Light Technical		Dimmable	Yes
Colour Code	170	Approval and Application	
Luminous flux (nom.)	4300 lm	Energy efficiency label (EEL)	A+
Luminous flux (rated) (nom.)	4300 lm	Mercury (Hg) content (nom.)	1.7 mg
Colour designation	Green (G)	Energy consumption kWh/1,000 hours	42 kWh
LLMF 2000 h Rated	90 %	Product Data	
Operating and Electrical		Full product code	871150064300140
Power (Rated) (Nom)	36.0 W	Order product name	TL-D Colored 36W Green 1SL/25
Lamp current (nom.)	0.440 A		

## TL-D Colored

EAN/UPC – product	8711500643001
Order code	64300140
SAP numerator – quantity per pack	1
Numerator – packs per outer box	25

SAP material	928048501705
SAP net weight (piece)	135.000 g


### Dimensional drawing

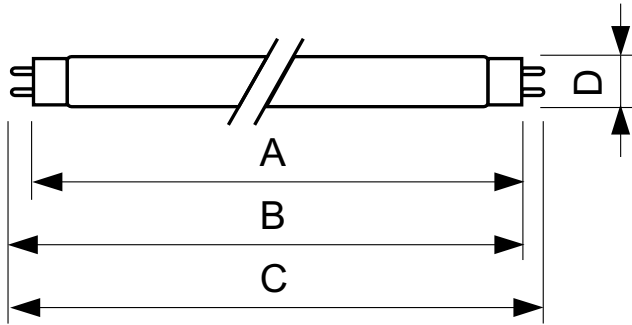

TL-D 36W/170 Green

Product	D (max)	A (max)	B (max)	B (min)	C (max)
TL-D Colored 36W Green 1SL/25	28.0 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm

### Photometric data

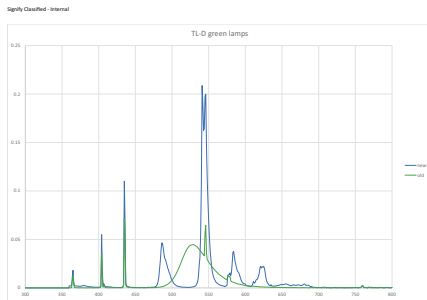

TL-DCOL 170

