



# MASTER TL-D Food

## MASTER TL-D Food 36W/79 1SL/25

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

### Product data

General Information	
Cap-Base	G13 [ Medium Bi-Pin Fluorescent]
Life to 50% Failures (Nom)	15000 h
Life to 50% Failures Preheat (Nom)	20000 h
Light Technical	
Colour Code	79
Luminous Flux (Nom)	1750 lm
Colour Designation	Food
Lumen Maintenance 2000 h (Nom)	90 %
Lumen Maintenance 5000 h (Nom)	85 %
Colour Temperature, horizontal (Nom)	3800 K
Luminous Efficacy (rated) (Nom)	49 lm/W
Colour Rendering Index horiz (Nom)	74
Operating and Electrical	
Power (Rated) (Nom)	36.0 W
Lamp Current (Nom)	0.440 A
Voltage (Nom)	103 V


Controls and Dimming	
Dimmable	Yes
Approval and Application	
Energy Efficiency Label	B
Mercury (Hg) Content (Nom)	5.0 mg
Energy Consumption kWh/1000 h	43 kWh
Product Data	
Full product code	871150070622540
Order product name	MASTER TL-D Food 36W/79 SLV/25
EAN/UPC - Product	8711500706225
Order code	70622540
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	25
Material Nr. (12NC)	928048502043
Net Weight (Piece)	135.000 g
ILCOS Code	FD-36/38/2A-E-G13

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

# MASTER TL-D Food



## Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
MASTER TL-D Food 36W/79 SLV/25	28 mm	1199.4 mm	1206.5 mm	1204.1 mm	1213.6 mm

TL-D Food 36W/79



## Photometric data

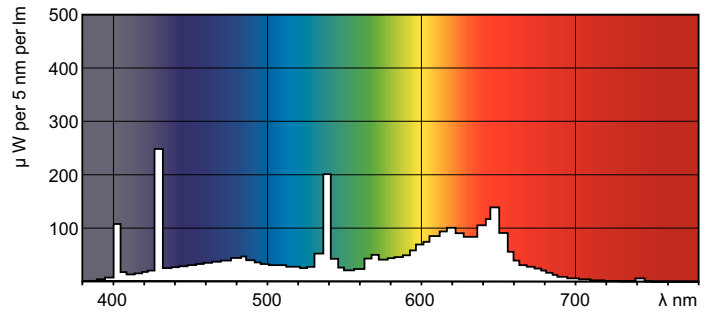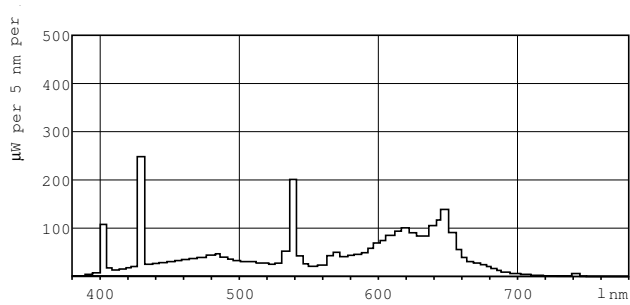

Lightcolour /79

Lightcolour /79

## Lifetime

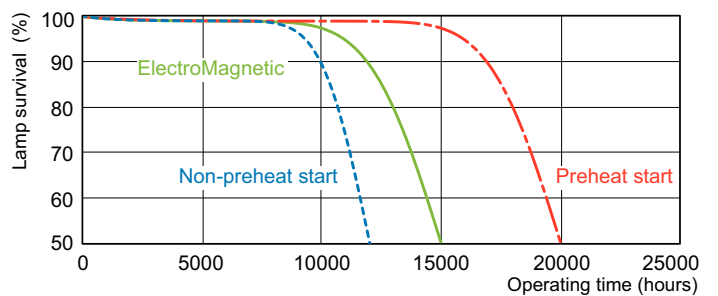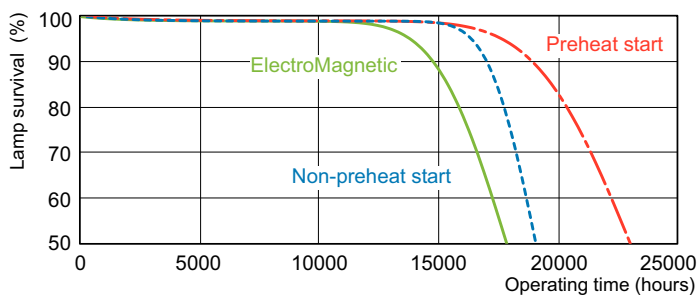


MASTER TL-D Food/Food Secura Life Expectancy 12 h cycle

MASTER TL-D Food/Food Secura Life Expectancy 3 h cycle

## MASTER TL-D Food

### Lifetime

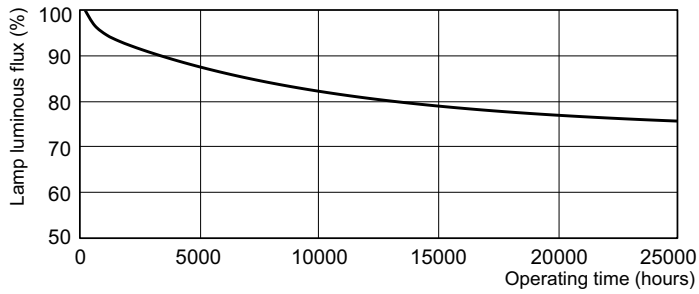

MASTER TL-D Food/Food Secura Lumen Maintenance 3 h + 12 h cycle

