



# MSR Hot Restrike

## MSR 400 HR 1CT/4

High-efficiency hot restrike metal halide lamps designed for optimum light collection

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


### Product data

General Information	
Cap-Base	GZZ9.5 [GZZ9.5]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life to 50% Failures (Nom)	1,000 hour(s)
Light Technical	
Color Code	- [Not Specified]
Luminous Flux (Min)	28,080 lm
Luminous Flux	31,200 lm
Chromaticity Coordinate X (Nom)	326
Chromaticity Coordinate Y (Nom)	321
Correlated Color Temperature (Nom)	5830 K
Luminous Efficacy (rated) (Nom)	78 lm/W
Color rendering index (CRI)	92
Arc Length O (Nom)	6.0 mm
Operating and Electrical	
Power Consumption	400 W

Lamp Current (Nom)	7 A
Controls and Dimming	
Dimmable	Yes
Product Data	
Order product name	MSR 400 HR 1CT/4
Full product name	MSR 400 HR 1CT/4
Full product code	871829122796000
Order code	928050205115
Material Nr. (12NC)	928050205115
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718291227960
Numerator - Packs per outer box	4
EAN/UPC - Case	8718291227977


# MSR Hot Restrike

## Dimensional drawing



Product	D (max)	O	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
MSR 400	23 mm	6.0	59 mm	61 mm	60	110 mm	24 mm	23.5	23 mm
HR 1CT/4		mm			mm			mm	

## Photometric data

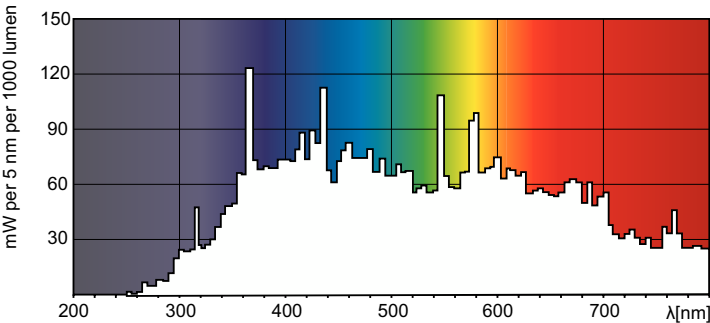

Spectral Power Distribution Colour – MSR 400 HR 1CT/4

