



# HPL-N

## HPL-N 125W/541 B22d-3 SG 1SL

Standard High Pressure Mercury lamp

### Warnings and Safety

- For use with control gear designed for high-pressure mercury lamps
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


### Product data

General Information	
Cap-Base	B22D-3 [B22d-3]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life to 50% Failures (Nom)	20,000 hour(s)
Light Technical	
Color Code	541 [CCT of 4100K]
Color Designation	Cool White (CW)
Chromaticity Coordinate X (Nom)	374
Chromaticity Coordinate Y (Nom)	373
Correlated Color Temperature (Nom)	4100 K
Luminous Efficacy (rated) (Nom)	50 lm/W
Color rendering index (CRI)	-
Operating and Electrical	
Power Consumption	125.0 W
Voltage (Nom)	125 V
Voltage (Nom)	125 V

Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Coated glass
Bulb Material	Soft Glass
Bulb Shape	B75 [B 75mm]
Approval and Application	
Energy Consumption kWh/1000 h	137 kWh
Product Data	
Order product name	HPL-N 125W/541 B22d-3 SG 1SL
Full product name	HPL-N 125W/541 B22d-3 SG 1SL
Full product code	871016314604100
Order code	928051107397
Material Nr. (12NC)	928051107397
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8710163146041
Numerator - Packs per outer box	25


EAN/UPC - Case	8727900077698
----------------	---------------

Dimensional drawing




Product	D (max)	C (max)
HPL-N 125W/541 B22d-3 SG 1SL	76 mm	171.5 mm

Photometric data

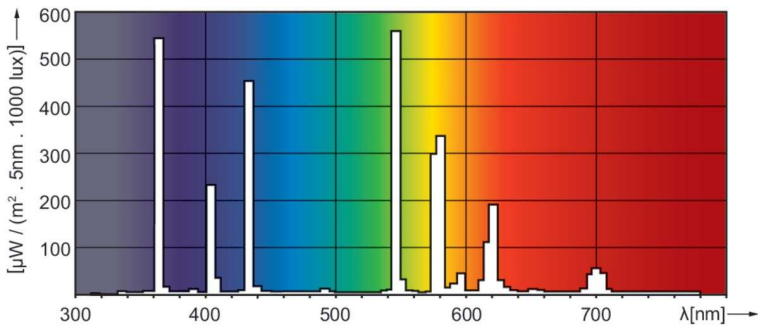


Spectral Power Distribution Colour - HPL-N 125W/541 B22d-3 SG 1SL

Lifetime

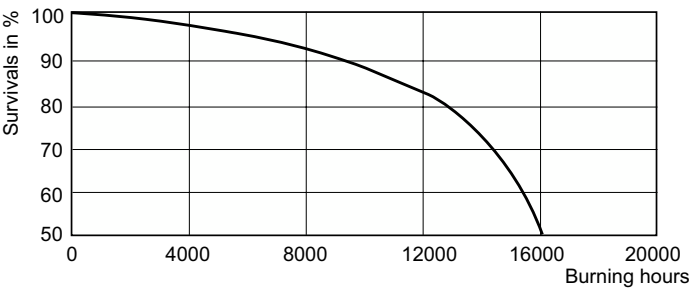

Life Expectancy Diagram - HPL-N 125W/541 B22d-3 SG 1SL

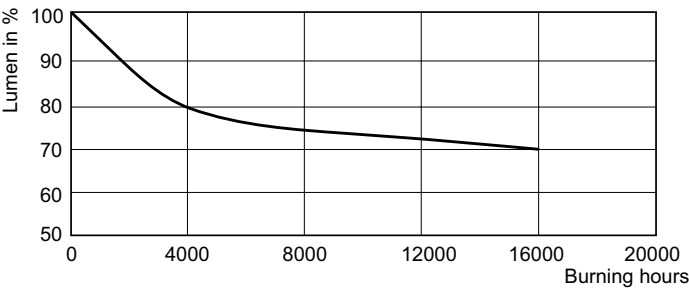

Lumen Maintenance Diagram - HPL-N 125W/541 B22d-3 SG 1SL

