



HPL-N

HPL-N 125W E27 SG 1CT/24

Standard High Pressure Mercury lamp

Warnings and Safety

- For use with control gear designed for high-pressure mercury lamps
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap-Base	E27
Operating Position	UNIVERSAL [Any or Universal (U)]
Life to 50% Failures (Nom)	16,000 hour(s)

Light Technical	
Color Code	542 [CCT of 4200K]
Color Designation	Cool White (CW)
Chromaticity Coordinate X (Nom)	374
Chromaticity Coordinate Y (Nom)	373
Correlated Color Temperature (Nom)	4200 K
Luminous Efficacy (rated) (Nom)	50 lm/W
Color rendering index (CRI)	46

Operating and Electrical	
Power Consumption	125.0 W
Voltage (Nom)	125 V
Voltage (Nom)	125 V

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Bulb Finish	Coated glass
Bulb Material	Soft Glass
Bulb Shape	E75


Approval and Application	
Mercury (Hg) Content (Nom)	19.0 mg
Energy Consumption kWh/1000 h	137 kWh

Product Data	
Order product name	HPL-N 125W E27 SG 1CT/24
Full product name	HPL-N 125W E27 SG 1CT/24
Full product code	871016314605800
Order code	928052007399
Material Nr. (12NC)	928052007399
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8710163146058

HPL-N


Numerator - Packs per outer box	25
EAN/UPC - Case	8727900077711

Dimensional drawing




Product	D (max)	C (max)
HPL-N 125W E27 SG 1CT/24	76 mm	173 mm

Photometric data

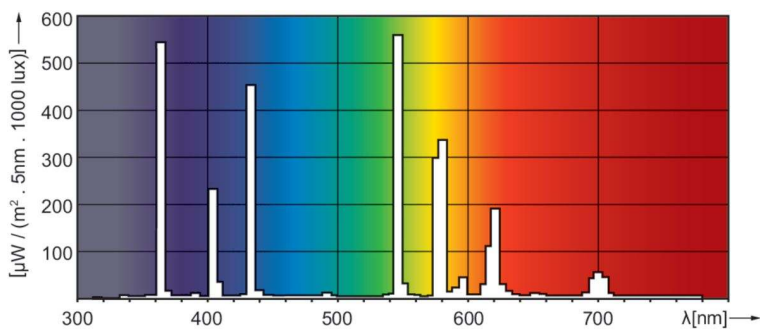


Spectral Power Distribution Colour - HPL-N 125W E27 SG 1CT/24

Lifetime

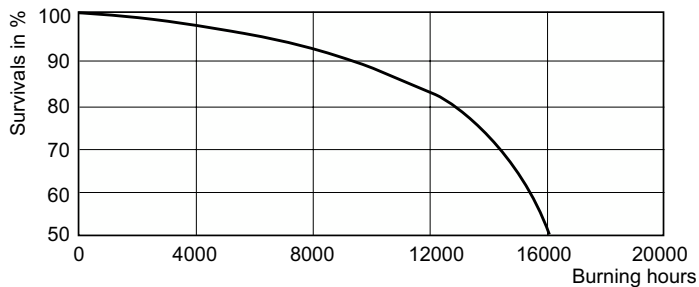

Life Expectancy Diagram - HPL-N 125W E27 SG 1CT/24

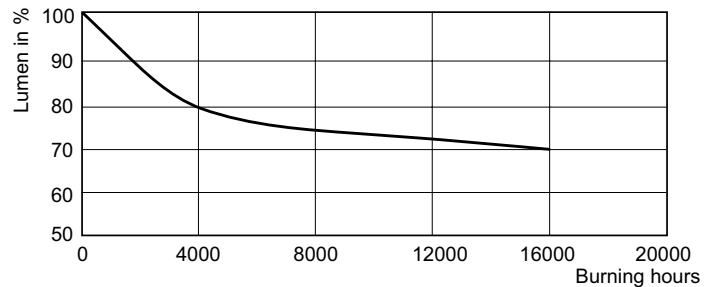

Lumen Maintenance Diagram - HPL-N 125W E27 SG 1CT/24

HPL-N

