



MSR Hot Restrike

MSR 125 HR 1CT/4

High-efficiency hot restrike metal halide lamps designed for optimum light collection

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Product data

General Information	
Cap-Base	GZX9.5 [GZX9.5]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life to 50% Failures (Nom)	200 h
Light Technical	
Color Code	- [Not Specified]
Luminous Flux (Min)	8,000 lm
Luminous Flux	9,400 lm
Chromaticity Coordinate X (Nom)	332
Chromaticity Coordinate Y (Nom)	326
Correlated Color Temperature (Nom)	6000 K
Luminous Efficacy (rated) (Nom)	75 lm/W
Color rendering index (CRI)	92
Arc Length O (Nom)	4.0 mm
Operating and Electrical	
Power Consumption	125 W
Lamp Current (Nom)	1.9 A

Controls and Dimming	
Dimmable	Yes
Product Data	
Order product name	MSR 125 HR 1CT/4
Full product name	MSR 125 HR 1CT/4
Full product code	871869641492700
Local code description	MSR125HR
Order code	928060205115
Material Nr. (12NC)	928060205115
Local order code	MSR125HR
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696414927
Numerator - Packs per outer box	4
EAN/UPC - Case	8718696414934


MSR Hot Restrike

Dimensional drawing



Product	D (max)	O	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
MSR 125 HR	17 mm	4.0	38 mm	40 mm	39	77 mm	24 mm	23.5	23 mm
1CT/4		mm			mm			mm	

Photometric data

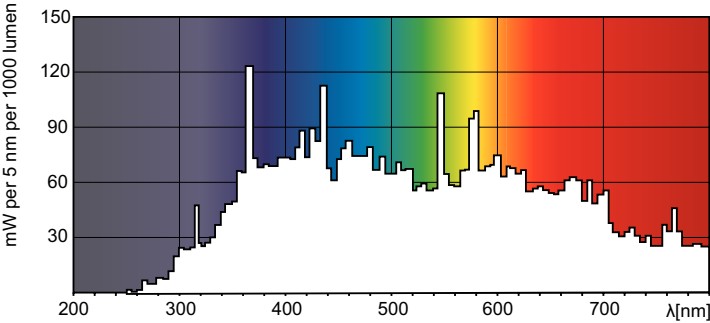

Spectral Power Distribution Colour – MSR 125 HR 1CT/4

