



# MASTERColour CDM-T Elite

## MASTERColour CDM-T Elite 100W/942 G12 1CT

Single-ended, high-efficiency Ceramic Metal Halide discharge lamp

### Product data

General Information		Color rendering index (nom.)	
Cap base	G12 [ G12]		91
Operating position	UNIVERSAL [ Any/Universal]	Operating and Electrical	
Life to 5% failures (nom.)	9000 h	Power (Rated) (Min)	100.0 W
Life to 10% failures (nom.)	10000 h	Power (Rated) (Nom)	100 W
Life to 20% failures (nom.)	12000 h	Re-ignition time (min.) (max.)	15 min
Life to 50% failures (nom.)	15000 h	Ignition time (max.)	30 s
ANSI code HID	-	Voltage (Max)	- V
		Voltage (Min)	- V
		Voltage (Nom)	88 V
Light Technical		Controls and Dimming	
Colour code	942 [ CCT of 4,200 K]	Dimmable	no
Luminous flux (rated) (nom.)	10500 lm	Run-up time 90% (max.)	3 min
Colour designation	Cool White (CW)	Mechanical and Housing	
Lumen maintenance 1,000 hours (nom.)	95 %	Bulb finish	Clear (CL)
Lumen maintenance 12,000 hours (nom.)	76 %	Approval and Application	
Lumen maintenance 2,000 hours (nom.)	92 %	Energy efficiency label (EEL)	A+
Lumen maintenance 4,000 hours (nom.)	88 %	Mercury (Hg) content (nom.)	8.5 mg
Chromaticity coordinate X (nom.)	0.373	Energy Consumption kWh/1000 h	110 kWh
Chromaticity coordinate Y (nom.)	0.369		
Correlated colour temperature (nom.)	4200 K		
Luminous efficacy (rated) (nom.)	105 lm/W		
Color rendering index (min.)	-		

# MASTERCcolour CDM-T Elite

UV	
PET (NIOSH) (min.)	8 h/500lx
Damage factor D/fc (max.)	0.4

Luminaire Design Requirements	
Bulb temperature (max.)	550 °C
Cap base temperature (max.)	250 °C
Pinch temperature (max.)	350 °C


Product Data	
Full product code	871829123178300
Order product name	MASTERCcolour CDM-T Elite 100W/942 G12 1CT

EAN/UPC – product	8718291231783
Order code	23178300
Local Code	100CDMTELITE942
Numerator – quantity per pack	1
Numerator – packs per outer box	12
Material no. (12NC)	928064205131
Net weight (piece)	0.033 kg
ILCOS Code	MT/UB-100/942-H-G12-21/100

## Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear. 35W & 70W lamps may also use electromagnetic gear.
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.



## Dimensional drawing



CDM-T Elite 100W/942 G12

Product	D (max)	O	L (min)	L (max)	L	C (max)
MASTERCcolour CDM-T Elite 100W/942 G12 1CT	20 mm	8.5 mm	55 mm	57 mm	56 mm	110 mm

## Photometric data

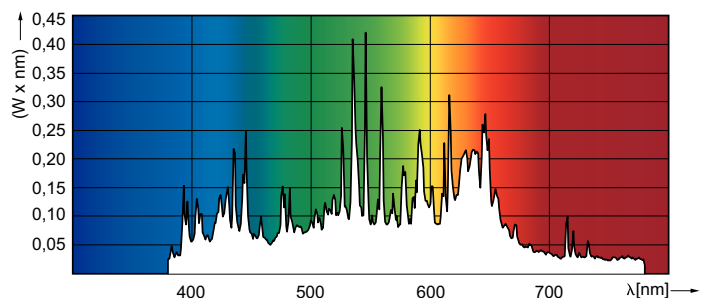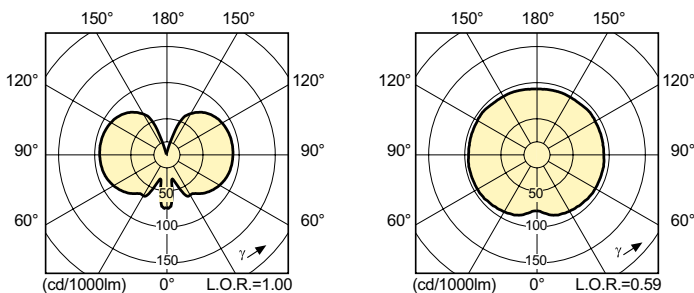

# MASTERColour CDM-T Elite

## Lifetime

