

PHILIPS

Lighting



HPI-T High Wattage

HPI-T 2000W/646 E40 220V CRP/4

Quartz metal halide lamps with clear outer bulb

Product data

General Information	
Cap base	E40 [E40]
Burning Position	P75 [Parallel +/-75D or Horizontal(HOR)]
Life to 5% failures (nom.)	3000 h
Life to 10% failures (nom.)	5500 h
Life to 20% failures (nom.)	8000 h
Life to 50% failures (nom.)	12000 h
System description	-
Light Technical	
Colour Code	646 [CCT of 4600K]
Lamp Luminous Flux (Min)	182000 lm
Lamp Luminous Flux (Nom)	189000 lm
Colour Designation	Cool White (CW)
Lumen maintenance 10,000 hours (nom.)	60 %
Lumen maintenance 2,000 hours (nom.)	77 %
Lumen maintenance 5,000 hours (nom.)	67 %
Chromaticity coordinate X (nom.)	375
Chromaticity coordinate Y (nom.)	385
Colour Temperature, horizontal (Nom)	4200 K
Lamp Luminous Efficacy EM (Nom)	96 lm/W
Colour Rendering Index,horiz (Nom)	63
Operating and Electrical	
Lamp supply voltage	220 V [220]
Technical Lamp Power (Nom)	1960.0 W

Lamp current run-up (max.)	28.4 A
Lamp current (EM) (nom.)	16.5 A
Ignition peak voltage (max.)	5000 V
Ignition supply voltage (min.)	198 V
Ignition time (max.)	30 s
Voltage (max.)	140 V
Voltage (min.)	120 V
Voltage (nom.)	130 V
Controls and Dimming	
Dimmable	no
Mechanical and Housing	
Bulb finish	Clear
Approval and Application	
Energy efficiency label (EEL)	A+
Mercury (Hg) content (nom.)	155 mg
Energy Consumption kWh/1000 h	2156 kWh
Luminaire Design Requirements	
Bulb temperature (max.)	600 °C
Cap base temperature (max.)	300 °C
Product Data	
Full product code	871150018376745

HPI-T High Wattage


Order product name	HPI-T 2000W/646 E40 220V CRP/4
EAN/UPC – product	8711500183767
Order code	928073609231
Numerator – quantity per pack	1
Numerator – packs per outer box	4

Material no. (12NC)	928073609231
Net weight (piece)	569.000 g
ILCOS Code	MT-2000/46/2B-H-E40-/H

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- For use with control gear designed for high-pressure mercury lamps
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing



Product	D (max)	O	L	C (max)
HPI-T 2000W/646 E40 220V CRP/4	101.5 mm	89 mm	290 mm	430 mm

HPI-T 2000W/646 E40 220V

Photometric data

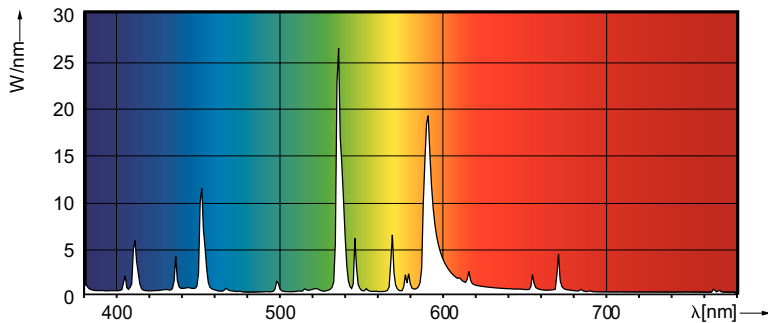

HPI-T High Wattage

Lifetime

