



# MHN-TD



## MHN-TD 150W/842 RX7s 1CT/12

Double-ended quartz Metal-halide lamp

### Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General information			
Cap-Base	RX7S [ RX7s]		Lamp color characteristics may change after long accumulate operating time.
Operating Position	P45 [ Parallel +/-45D or Horizontal(HOR)]	<b>Footnotes HID 2</b>	Supply volts must be +/- 5% of rated ballast line volts for reactor type and +/- 10% for CWA or electronic ballasts.
Life to 5% Failures (Min)	4000 h	<b>Flux measurement reference</b>	Sphere
Life to 5% Failures (Nom)	5000 h		
Life to 20% Failures (Min)	6500 h	<b>Light technical</b>	
Life to 20% Failures (Nom)	8000 h	<b>Color Code</b>	842 [ CCT of 4200K]
Life to 50% Failures (Min)	8500 h	<b>Luminous Flux (Nom)</b>	12500 lm
Life to 50% Failures (Nom)	10500 h	<b>Luminous Flux (Rated) (Min)</b>	11250 lm
ANSI Code HID	M81/E	<b>Luminous Flux (Rated) (Nom)</b>	12500 lm
<b>Footnotes HID 1</b>	Color characteristics may vary somewhat from one lamp type to another. Time should be allowed for the lamp to stabilize in color when it is turned on for the first time or if for any reason its operating position is changed. This may require several hours' operation, with more than one start. Lamp color and output may change temporarily if the lamp is subjected to excess vibration or shock.	<b>Color Designation</b>	Cool White (CW)
		<b>Lumen Maintenance 10000 h (Min)</b>	60 %
		<b>Lumen Maintenance 10000 h (Nom)</b>	70 %
		<b>Lumen Maintenance 2000 h (Min)</b>	74 %
		<b>Lumen Maintenance 2000 h (Nom)</b>	80 %
		<b>Lumen Maintenance 5000 h (Min)</b>	68 %

# MHN-TD

Lumen Maintenance 5000 h (Nom)	75 %
Chromaticity Coordinate X (Nom)	0.371
Chromaticity Coordinate Y (Nom)	0.366
Correlated Color Temperature (Nom)	4200 K
Luminous Efficacy (Rated) (Min)	73 lm/W
Luminous Efficacy (rated) (Nom)	81 lm/W
Color Rendering Index (Nom)	81

## Operating and electrical

Power (Nom)	155.0 W
Lamp Current Run-Up (Max)	2.4 A
Lamp Current (EM) (Nom)	1.8 A
Ignition Supply Voltage (Max)	198 V
Ignition Peak Voltage (Max)	5000 V
Ignition Supply Voltage (Min)	198 V
Ignition Peak Voltage (Min)	3500 V
Voltage (Max)	108 V
Voltage (Min)	88 V
Voltage (Nom)	98 V

## Controls and dimming

Dimmable	No
----------	----

## Mechanical and housing

Bulb Finish	Clear
Cap-Base Information	-

Bulb Shape	TD
------------	----

## Approval and application

Energy Efficiency Class	G
Mercury (Hg) Content (Max)	12.3 mg
Mercury (Hg) Content (Nom)	12.3 mg
Energy Consumption kWh/1000 h	155 kWh
EPREL Registration Number	473320


## Luminaire design requirements

Bulb Temperature (Max)	650 °C
Pinch Temperature (Max)	280 °C

## Product data

Full product code	871829121536300
Order product name	MHN-TD 150W/842 RX7s 1CT/12
EAN/UPC - Product	8718291215363
Order code	928076505190
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	12
Material Nr. (12NC)	928076505190
Net Weight (Piece)	0.028 kg
ILCOS Code	MD/UB-150/842-H-RX7s-25/135.4

## Dimensional drawing

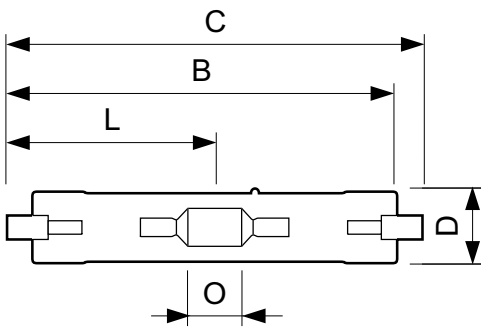


MHN-TD 150W/842 RX7s 1CT/12

Product	D (max)	D	O	C (max)
MHN-TD 150W/842 RX7s 1CT/12	23.0 mm	0.89 in	17.8 mm	135.4 mm


# MHN-TD

## Photometric data

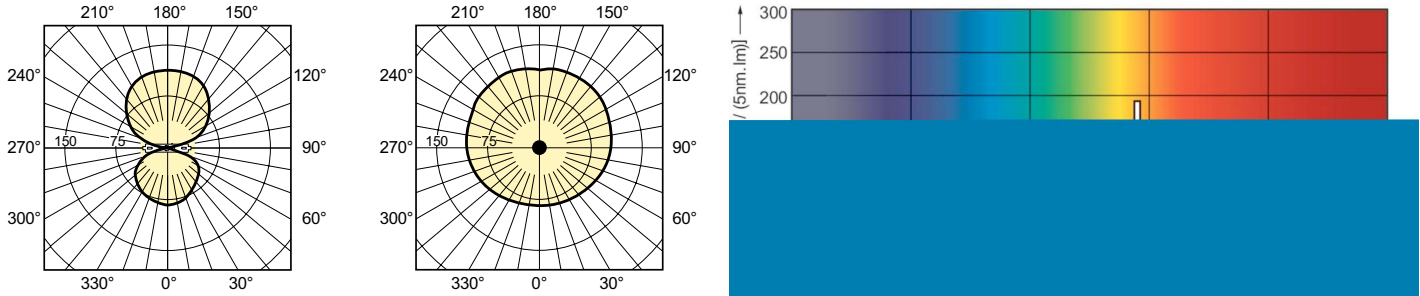


LDLD\_MHN-TD-Light distribution diagram

## Lifetime

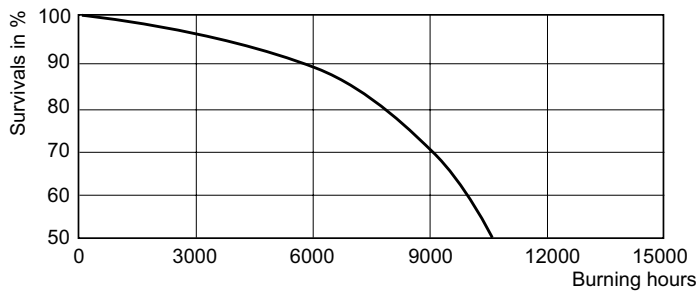

LDLE\_MHN-TD\_70W\_150W\_842-Life expectancy diagram

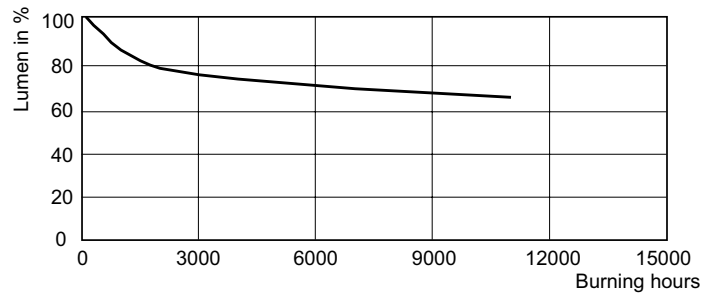

LDLM\_MHN-TD\_70W\_150W\_842-Lumen maintenance diagram

