



# MSR

## MSR 400 1CT/4

The high color rendering index of the single ended MSR series ensures that everyone in the audience can enjoy the true colors of the scenery, the stage props, the players and their costumes – in fact everything that is on stage can be made bright and vivid in daylight quality light. Also, thanks to the single ended lamp concept, the luminaire has optimal light collection and direction possibilities to help ensure brightness on stage exactly where and when it is needed. In addition, the MSR can be used in any burning position for easy set-up and convenience.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data


General Information		Arc Length O (Nom)	
Cap-Base	GX9.5		6.0 mm
Operating Position	UNIVERSAL [Any or Universal (U)]	Operating and Electrical	
Life to 50% Failures (Nom)	1,000 hour(s)	Power Consumption	400 W
		Lamp Current (Nom)	7 A
Light Technical		Controls and Dimming	
Color Code	- [Not Specified]	Dimmable	No
Luminous Flux (Min)	28,440 lm	Product Data	
Luminous Flux	31,600 lm	Order product name	MSR 400 1CT/4
Chromaticity Coordinate X (Nom)	326	Full product name	MSR 400 1CT/4
Chromaticity Coordinate Y (Nom)	321	Full product code	871869641600600
Correlated Color Temperature (Nom)	5830 K	Order code	41600600
Luminous Efficacy (rated) (Nom)	79 lm/W	Material Nr. (12NC)	928077905115
Color rendering index (CRI)	95		

# MSR

Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718696416006
Numerator - Packs per outer box	4


EAN/UPC - Case	8718696416013
----------------	---------------

## Dimensional drawing

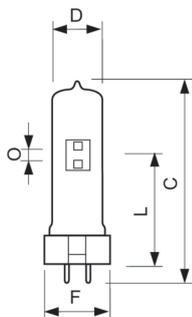

Product	D (max)	O	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
MSR 400	23 mm	6.0	61 mm	63 mm	62	112 mm	36 mm	35	34 mm
1CT/4		mm			mm			mm	

## Photometric data

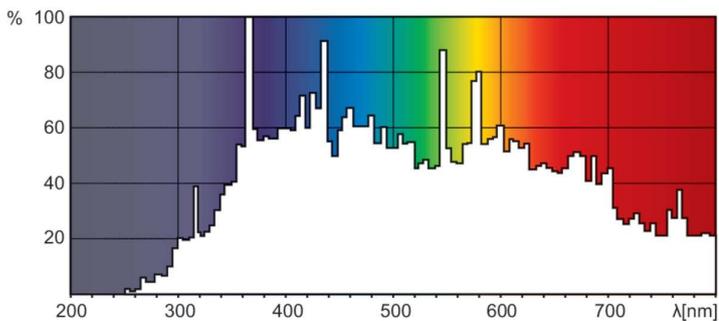

Spectral Power Distribution Colour - MSR 400 1CT/4

