



# MASTERColour CDM-TC Elite

## MASTERC CDM-TC Elite 50W/942 G8.5 1CT

Single-ended, compact size, high-efficiency Ceramic Metal Halide discharge lamp

### Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Use only with electronic control gear
- Use only with electronic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data


General Information		Luminous Flux	
Cap-Base	G8.5 [G8.5]	5,050 lm	
Operating Position	UNIVERSAL [Any or Universal (U)]	Color Designation	
Flux measurement reference	Sphere	Cool White (CW)	
Life to 50% Failures (Nom)	15,000 hour(s)	Chromaticity Coordinate X (Nom)	
		0.371	
		Chromaticity Coordinate Y (Nom)	
		0.366	
		Correlated Color Temperature (Nom)	
		4200 K	
		Luminous Efficacy (rated) (Nom)	
		101 lm/W	
		Color rendering index (CRI)	
		90	
Light Technical			
Color Code	942 [CCT of 4200K]		

MASTERC colour CDM-TC Elite

Arc Length O (Nom)	7.1 mm
Operating and Electrical	
Power Consumption	50.2 W
Voltage (Nom)	93 V
Voltage (Nom)	93 V
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	T14 [T 14 mm]
Approval and Application	
Energy Efficiency Class	F
Mercury (Hg) Content (Max)	5.7 mg


Mercury (Hg) Content (Nom)	5.7 mg
Energy Consumption kWh/1000 h	51 kWh
EPREL Registration Number	473323
Product Data	
Order product name	MASTERC CDM-TC Elite 50W/942 G8.5 1CT
Full product name	MASTERC CDM-TC Elite 50W/942 G8.5 1CT
Full product code	871829120163200
Order code	928080115131
Material Nr. (12NC)	928080115131
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718291201632
Numerator - Packs per outer box	12
EAN/UPC - Case	8718291201649

Dimensional drawing




Product	D (max)	O	L (min)	L (max)	L	C (max)
MASTERC CDM-TC Elite 50W/942 G8.5 1CT	15 mm	7.1 mm	51 mm	53 mm	52 mm	85 mm

Photometric data

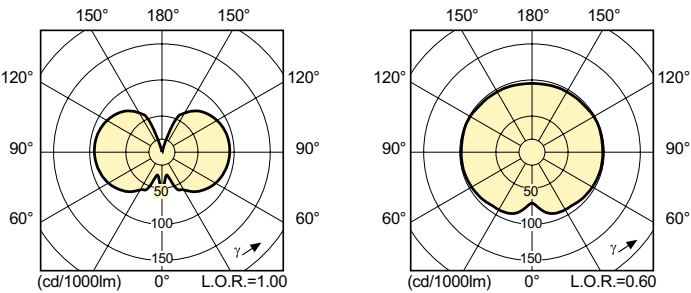


Light Distribution Diagram - MASTERC CDM-TC Elite 50W/942 G8.5 1CT

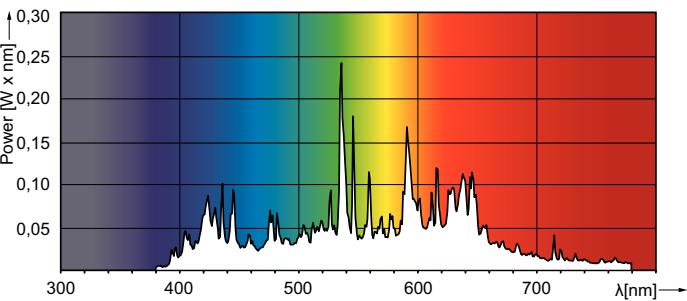


Spectral Power Distribution Colour - MASTERC CDM-TC Elite 50W/942 G8.5 1CT

MASTERC colour CDM-TC Elite

Lifetime

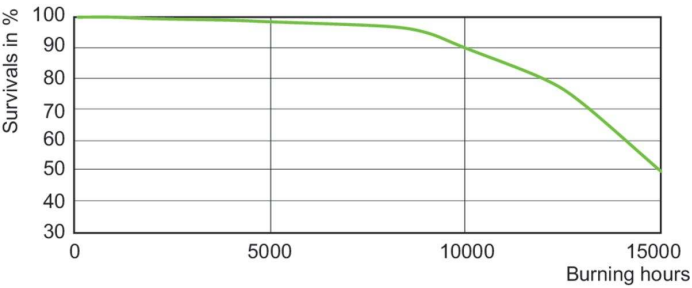

Life Expectancy Diagram - MASTERC CDM-TC Elite 50W/942 G8.5 1CT

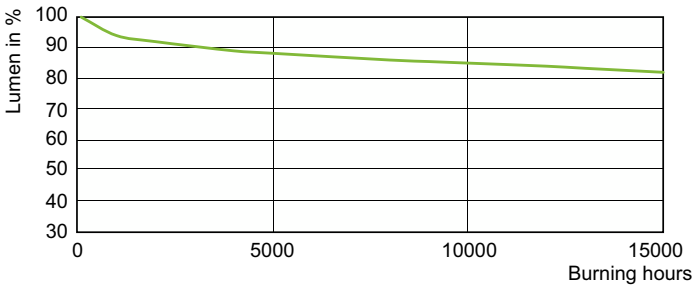

Lumen Maintenance Diagram - MASTERC CDM-TC Elite 50W/942 G8.5 1CT

