



MASTERColour CDM-T

MASTERColour CDM-T 35W/830 G12 1CT/12

Range of single-ended, compact, high-efficiency, discharge lamps with a stable color over lifetime and a crisp, sparkling light

Warnings and Safety

- · Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- $\boldsymbol{\cdot}$ The luminaire must be able to contain hot lamp parts if the lamp ruptures
- \cdot Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Lamps may use electronic or electromagnetic control gear, except 35W/942 and 20W lamps, which must use electronic control
 gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information					
Cap-Base	G12				
Operating Position	UNIVERSAL [Any or Universal (U)]				
Flux measurement reference	Sphere				
Life to 50% Failures (Nom)	12,000 hour(s)				
Light Technical					
Color Code	830 [CCT of 3000K]				
Luminous Flux	3,100 lm				
Color Designation	Warm White (WW)				
Chromaticity Coordinate X (Nom)	0.434				
Chromaticity Coordinate Y (Nom)	0.398				
Correlated Color Temperature (Nom)	3000 K				

Luminous Efficacy (rated) (Nom)	79 lm/W
Color rendering index (CRI)	83
Arc Length O (Nom)	5 mm
Operating and Electrical	
Power Consumption	39.1 W
Voltage (Nom)	82 V
Voltage (Nom)	82 V
Controls and Dimming	
Dimmable	No


Datasheet, 2023, May 15 data subject to change

MASTERColour CDM-T

Mechanical and Housing					
Bulb Finish	Clear				
Bulb Shape	T19				
Approval and Application					
Energy Efficiency Class	G				
Mercury (Hg) Content (Max)	3.2 mg				
Mercury (Hg) Content (Nom)	3.1 mg				
Energy Consumption kWh/1000 h	40 kWh				
EPREL Registration Number	473333				
Product Data					
Order product name	MASTERC CDM-T 35W/830 G12 1CT/12				


Full product name	MASTERColour CDM-T 35W/830 G12 1CT/12				
Full product code	871150019697215				
Order code	19697215				
Material Nr. (12NC)	928083105125				
Numerator - Quantity Per Pack	1				
EAN/UPC - Product/Case	8711500196972				
Numerator - Packs per outer box	12				
EAN/UPC - Case	8711500196989				


Dimensional drawing




Product	D (max)	D	0	L (min)	L (max)	L	C (max)
MASTERC CDM-T	20 mm	0.75 inch	5 mm	55 mm	57 mm	56 mm	103 mm
35W/830 G12 1CT/12							

Photometric data





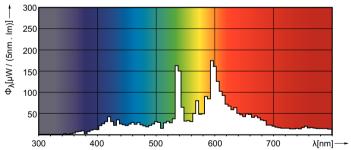



Light Distribution Diagram - MASTERC CDM-T 35W/830 G12 1CT/12

Spectral Power Distribution Colour - MASTERC CDM-T 35W/830 G12 1CT/12

MASTERColour CDM-T

Lifetime

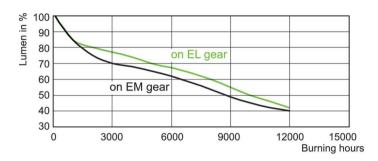

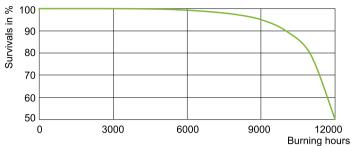

Lumen Maintenance Diagram - MASTERC CDM-T 35W/830 G12 1CT/12

Life Expectancy Diagram - MASTERC CDM-T 35W/830 G12 1CT/12



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.