



MASTERColour CDM-R

MASTERC CDM-R 35W/830 E26 PAR30L 10D 1CT

Range of compact, high-efficiency, discharge reflector lamps with a stable color over lifetime and a crisp, sparkling light

Warnings and Safety

- · Control gear must include end-of-life protection (IEC61167, IEC 62035)
- \cdot Use only with electronic control gear. Color 830 lamps may also use electromagnetic gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information					
Cap-Base	E26 [Single Contact Medium Screw]				
Operating Position	UNIVERSAL [Any or Universal (U)]				
Life to 50% Failures (Nom)	8,000 hour(s)				
Light Technical					
Color Code	830 [CCT of 3000K]				
Beam Angle (Nom)	10 degree(s)				
Luminous Intensity (Nom)	44,000 cd				
Color Designation	Warm White (WW)				
Chromaticity Coordinate X (Nom)	0.431				
Chromaticity Coordinate Y (Nom)	0.400				
Correlated Color Temperature (Nom)	3000 K				
Color rendering index (CRI)	81				

Operating and Electrical				
Power Consumption	38.0 W			
Warm-up time to 60% light	120 s			
Voltage (Nom)	86 V			
Voltage (Nom)	86 V			
Controls and Dimming				
Dimmable	No			
Mechanical and Housing				
Bulb Finish	Clear			
Bulb Shape	PAR30L [PAR 3.75 inch/95mm Long]			
Approval and Application				
Mercury (Hg) Content (Nom)	2.8 mg			


Datasheet, 2023, September 4 data subject to change

MASTERColour CDM-R

Energy Consumption kWh/1000 h	42 kWh
Product Data	
Order product name	MASTERC CDM-R 35W/830 E26 PAR30L 10D 1CT
Full product name	MASTERC CDM-R 35W/830 E26 PAR30L 10D 1CT
Full product code	872790088716700
Order code	928085500610

Material Nr. (12NC)	928085500610
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8727900887167
Numerator - Packs per outer box	6
EAN/UPC - Case	8727900887174


Dimensional drawing



Product	D (max)	D	C (max)	c
MASTERC CDM-R 35W/830 E26 PAR30L 10D 1CT	97 mm	95 mm	120 mm	118 mm

Photometric data



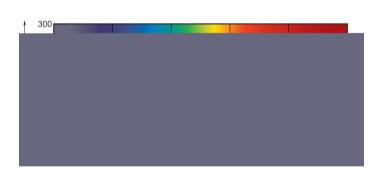


Light Distribution Diagram - MASTERC CDM-R 35W/830 E26 PAR30L 10D 1CT

Spectral Power Distribution Colour - MASTERC CDM-R 35W/830 E26 PAR30L 10D 1CT

MASTERColour CDM-R

Lifetime

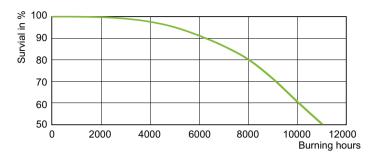



Life Expectancy Diagram - MASTERC CDM-R 35W/830 E26 PAR30L 10D 1CT

Lumen Maintenance Diagram - MASTERC CDM-R 35W/830 E26 PAR30L 10D 1CT



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.