



# CDM-SA/T

## CDM-SA/T 150W 12PK

With a high luminous efficacy producing more lumens per watt than standard Architainment lamps, the CDM-SA/T is the greener alternative to light up the night. In addition, the optimal lamp filling and short arc of the lamp create a high beam intensity and excellent color rendering.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

| General Information                |                                  |
|------------------------------------|----------------------------------|
| Cap-Base                           | G12 [G12]                        |
| Operating Position                 | UNIVERSAL [Any or Universal (U)] |
| Flux measurement reference         | Sphere                           |
| Life to 50% Failures (Nom)         | 9,000 hour(s)                    |
| Light Technical                    |                                  |
| Color Code                         | 942 [CCT of 4200K]               |
| Luminous Flux                      | 13,000 lm                        |
| Color Designation                  | Cool White (CW)                  |
| Chromaticity Coordinate X (Nom)    | 0.371                            |
| Chromaticity Coordinate Y (Nom)    | 0.366                            |
| Correlated Color Temperature (Nom) | 4200 K                           |
| Luminous Efficacy (rated) (Nom)    | 84 lm/W                          |
| Color rendering index (CRI)        | 95                               |
| Arc Length O (Nom)                 | 6 mm                             |

| Operating and Electrical      |         |
|-------------------------------|---------|
| Power Consumption             | 155.0 W |
| Lamp Current (Nom)            | 1.8 A   |
| Controls and Dimming          |         |
| Dimmable                      | No      |
| Approval and Application      |         |
| Energy Efficiency Class       | G       |
| Mercury (Hg) Content (Max)    | 11.9 mg |
| Energy Consumption kWh/1000 h | 155 kWh |
| EPREL Registration Number     | 897559  |


| Product Data       |                          |
|--------------------|--------------------------|
| Order product name | CDM-SA/T 150W/942 1CT/12 |
| Full product name  | CDM-SA/T 150W 12PK       |
| Full product code  | 871150020094515          |
| Order code         | 360396                   |

CDM-SA/T

|                                 |               |
|---------------------------------|---------------|
| Material Nr. (12NC)             | 928086605103  |
| Numerator - Quantity Per Pack   | 1             |
| EAN/UPC - Product/Case          | 8711500200945 |
| Numerator - Packs per outer box | 12            |


|                |               |
|----------------|---------------|
| EAN/UPC - Case | 8711500200952 |
|----------------|---------------|

Dimensional drawing



| Product  | D (max) | O  | L (min) | L (max) | L  | C (max) | F (max) | F  | F (min) |
|----------|---------|----|---------|---------|----|---------|---------|----|---------|
| CDM-SA/T | 20 mm   | 6  | 55 mm   | 57 mm   | 56 | 110 mm  | 31 mm   | 30 | 29 mm   |
| 150W/942 |         | mm |         |         | mm |         |         | mm |         |
| 1CT/12   |         |    |         |         |    |         |         |    |         |

Photometric data

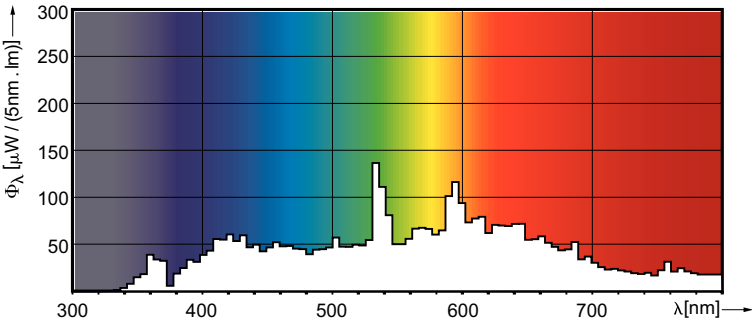

Spectral Power Distribution Colour – CDM-SA/T 150W/942 1CT/12

