



CDM-SA/T

CDM-SA/T 150W 12PK

With a high luminous efficacy producing more lumens per watt than standard Architainment lamps, the CDM-SA/T is the greener alternative to light up the night. In addition, the optimal lamp filling and short arc of the lamp create a high beam intensity and excellent color rendering.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Lamp contains mercury.
- Manage in Accord with Disposal Laws.
- See: www.lamprecycle.org or 1-800-555-0050

Product data


| General Information | | Arc Length O (Nom) | |
|------------------------------------|----------------------------------|-------------------------------|---------|
| Cap-Base | G12 | | 6 mm |
| Operating Position | UNIVERSAL [Any or Universal (U)] | Operating and Electrical | |
| Flux measurement reference | Sphere | Power Consumption | 155.0 W |
| Life to 50% Failures (Nom) | 9,000 hour(s) | Lamp Current (Nom) | 1.8 A |
| Light Technical | | Controls and Dimming | |
| Color Code | 942 [CCT of 4200K] | Dimmable | No |
| Luminous Flux | 13,000 lm | Approval and Application | |
| Color Designation | Cool White (CW) | Energy Efficiency Class | G |
| Chromaticity Coordinate X (Nom) | 0.371 | Mercury (Hg) Content (Max) | 11.9 mg |
| Chromaticity Coordinate Y (Nom) | 0.366 | Energy Consumption kWh/1000 h | 155 kWh |
| Correlated Color Temperature (Nom) | 4200 K | EPREL Registration Number | 897559 |
| Luminous Efficacy (rated) (Nom) | 84 lm/W | | |
| Color rendering index (CRI) | 95 | | |

CDM-SA/T

| Product Data | |
|---------------------|--------------------------|
| Order product name | CDM-SA/T 150W/942 1CT/12 |
| Full product name | CDM-SA/T 150W 12PK |
| Full product code | 871150020094515 |
| Order code | 360396 |
| Material Nr. (12NC) | 928086605103 |


| | |
|---------------------------------|---------------|
| Numerator - Quantity Per Pack | 1 |
| EAN/UPC - Product/Case | 8711500200945 |
| Numerator - Packs per outer box | 12 |
| EAN/UPC - Case | 8711500200952 |

Dimensional drawing



| Product | D (max) | O | L (min) | L (max) | L (max) | C (max) | F (max) | F | F (min) |
|--------------------------------|---------------|-------------|----------------|---------------|---------------|---------------|---------------|----------------|----------------|
| CDM-SA/T 150W/942 1CT/12 | 13/16 inch | 1/4 inch | 2-3/16 inch | 2-1/4 inch | 2-1/4 inch | 4-3/8 inch | 1-1/4 inch | 1-3/16 inch | 1-3/16 inch |

Photometric data

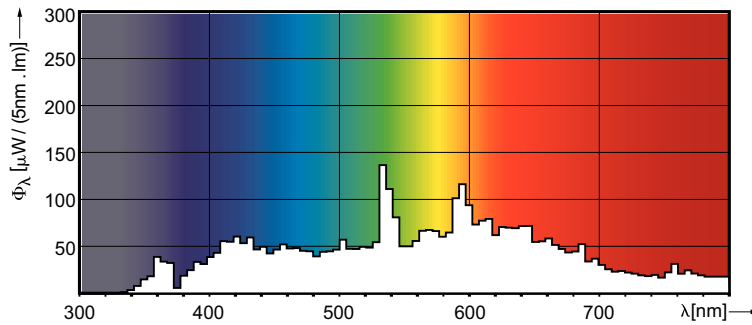

Spectral Power Distribution Colour - CDM-SA/T 150W/942 1CT/12

