



# MASTERColour CDM-T

## MASTERC CDM-T 250W/830 G12 1CT/12

Range of single-ended, compact, high-efficiency, discharge lamps with a stable colour over lifetime and a crisp, sparkling light

### Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- Lamps may use electronic or electromagnetic control gear, except 35W/942 and 20W lamps, which must use electronic control gear.
- Lamps may use electronic or electromagnetic control gear, except 35W/942 and 20W lamps, which must use electronic control gear.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information	
Cap-Base	G12 [G12]
Operating Position	UNIVERSAL [Any or Universal (U)]
Flux measurement reference	Sphere

Life to 50% Failures (Nom)	15,000 hour(s)
Light Technical	
Color Code	830 [CCT of 3000K]
Luminous Flux	27,750 lm

# MASTERC colour CDM-T

Color Designation	Warm White (WW)
Chromaticity Coordinate X (Nom)	0.434
Chromaticity Coordinate Y (Nom)	0.398
Correlated Color Temperature (Nom)	3000 K
Luminous Efficacy (rated) (Nom)	111 lm/W
Color rendering index (CRI)	85
Arc Length O (Nom)	12.3 mm

## Operating and Electrical

Power Consumption	250.0 W
Voltage (Nom)	95 V
Voltage (Nom)	95 V


## Controls and Dimming

Dimmable	No
----------	----


## Mechanical and Housing

Bulb Finish	Clear
Bulb Shape	T24 [T 24mm]

## Dimensional drawing



## Photometric data

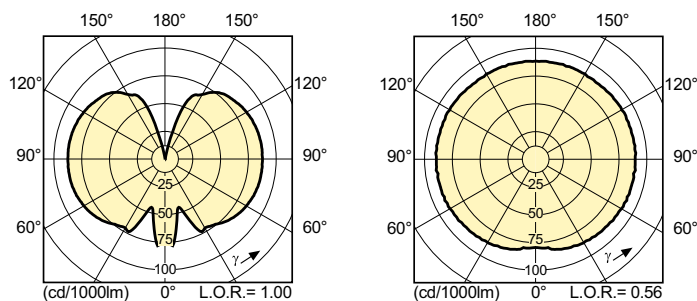

Light Distribution Diagram - MASTERC CDM-T 250W/830 G12 1CT/12


## Approval and Application

Energy Efficiency Class	F
Mercury (Hg) Content (Max)	27.5 mg
Mercury (Hg) Content (Nom)	27.5 mg
Energy Consumption kWh/1000 h	250 kWh
EPREL Registration Number	473350

## Product Data

Order product name	MASTERC CDM-T 250W/830 G12 1CT/12
Full product name	MASTERC CDM-T 250W/830 G12 1CT/12
Full product code	871150020801915
Order code	928089805131
Material Nr. (12NC)	928089805131
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500208019
Numerator - Packs per outer box	12
EAN/UPC - Case	8711500208026


Product	D (max)	O	L (min)	L (max)	L	C (max)
MASTERC CDM-T 250W/830 G12 1CT/12	25 mm	12.3 mm	71.5 mm	73.5 mm	72.5 mm	135 mm

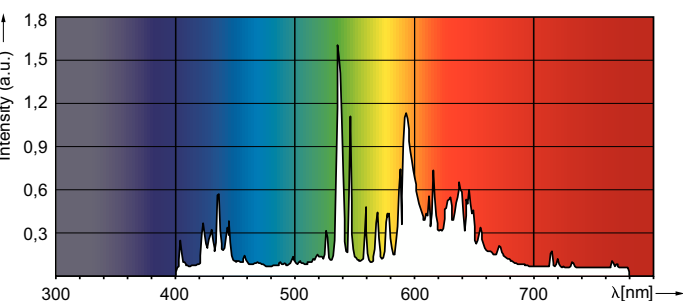

Spectral Power Distribution Colour - MASTERC CDM-T 250W/830 G12 1CT/12

MASTERC colour CDM-T

Lifetime

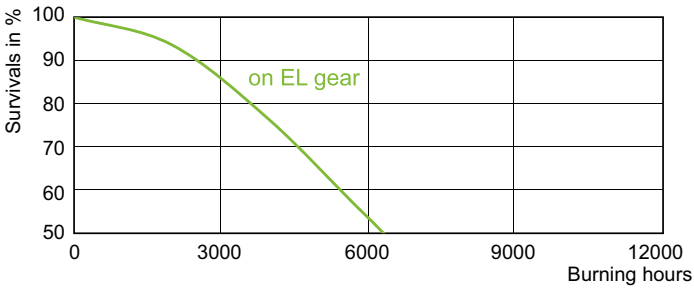

Lumen Maintenance Diagram - MASTERC CDM-T 250W/830 G12 1CT/12

Life Expectancy Diagram - MASTERC CDM-T 250W/830 G12 1CT/12

