Lighting

PHILIPS



MASTER CosmoWhite CPO-TW & CPO-TW Xtra

MST CosmoWh CPO-TW Xtra 90W/728 PGZ12

New-generation ceramic metal halide lamps used in Outdoor offering efficient and pleasant white light

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- \cdot The luminaire must be able to contain hot lamp parts if the lamp ruptures
- \cdot Use only with electronic control gear
- Control gear must include end-of-life protection (IEC61167, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

	Chromaticity Coordinate Y (Nom)	0.4		
	Correlated Color Temperature (Nom)	2800 K		
ıy or Universal (U)]	Luminous Efficacy (rated) (Nom)	120 lm/W		
	Color rendering index (CRI)	70		
	Arc Length O (Nom)	18 mm		
	Operating and Electrical			
00K]	Power Consumption	90.0 W		
	Voltage (Nom)	92 V		
	Voltage (Nom)	92 V		


A ↑ G

MASTER CosmoWhite CPO-TW & CPO-TW Xtra


Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	T19
Approval and Application	
Energy Efficiency Class	E
Mercury (Hg) Content (Max)	3 mg
Mercury (Hg) Content (Nom)	3.0 mg
Energy Consumption kWh/1000 h	90 kWh
EPREL Registration Number	473351

Product Data			
Order product name	MST CosmoWh CPO-TW Xtra 90W/728 PGZ12		
Full product name	MST CosmoWh CPO-TW Xtra 90W/728 PGZ12		
Full product code	871150021121715		
Order code	928093505127		
Material Nr. (12NC)	928093505127		
Numerator - Quantity Per Pack	1		
EAN/UPC - Product/Case	8711500211217		
Numerator - Packs per outer box	12		
EAN/UPC - Case	8711500211224		

Dimensional drawing




Photometric data



Light Distribution Diagram - MST CosmoWh CPO-TW Xtra 90W/728 PGZ12


Product	D (max)	D	0	L	C (max)
MST CosmoWh CPO-TW Xtra 90W/728	20 mm	19 mm	18 mm	66 mm	143 mm
PGZ12					

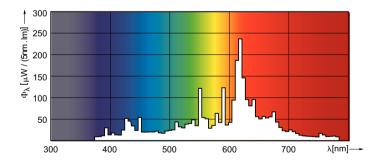

Spectral Power Distribution Colour - MST CosmoWh CPO-TW Xtra 90W/728 PGZ12

MASTER CosmoWhite CPO-TW & CPO-TW Xtra

Lifetime

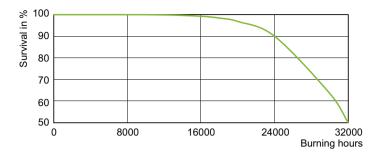

Life Expectancy Diagram - MST CosmoWh CPO-TW Xtra 90W/728 PGZ12

\$ 100 90 80 70 60 500 5000 1000 1500 20000 Burning hours

Lumen Maintenance Diagram - MST CosmoWh CPO-TW Xtra 90W/728 PGZ12



© 2024 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2024, March 21 - data subject to change