



MSD

MSD 200 1CT/40

MSD – right light, stage bright These single ended, compact lamps enable optimal light collection and accurate beam control, while they also provide true daylight colour temperatures – all to create great stage brightness and vivid entertainment. And since they offer long lifetime usage they help minimize the cost of ownership via fewer lamp replacements and fewer maintenance man hour costs.

Warnings and Safety


- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap base	GY9.5 [GY9.5]
Operating position	UNIVERSAL [Any or Universal (U)]
Life to 50% failures (nom.)	2,000 h
Light Technical	
Colour Code	- [Not Specified]
Luminous flux (min.)	11,880 lm
Luminous Flux	13,200 lm
Chromaticity Coordinate X (Nom)	323
Chromaticity Coordinate Y (Nom)	321
Correlated Colour Temperature	5990 K
Luminous efficacy (rated) (nom.)	66 lm/W
Colour rendering index (CRI)	80
Arc Length O (Nom)	5.0 mm


Operating and Electrical	
Power Consumption	200 W
Lamp current (nom.)	3.4 A
Controls and Dimming	
Dimmable	No
Product Data	
Order product name	MSD 200 1CT/40
Full product name	MSD 200 1CT/40
Full EOC	872790091470200
Order code	91470200
Material no. (12 NC)	928097205114
SAP numerator – quantity per pack	1
EAN/UPC – Product/Case	8727900914702
Numerator – packs per outer box	40
EAN/UPC – Case	8727900914719

Dimensional drawing



Product	D (max)	O	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
MSD 200	23 mm	5.0	54 mm	56 mm	55	108 mm	29 mm	28	27 mm
1CT/40		mm			mm			mm	

Photometric data

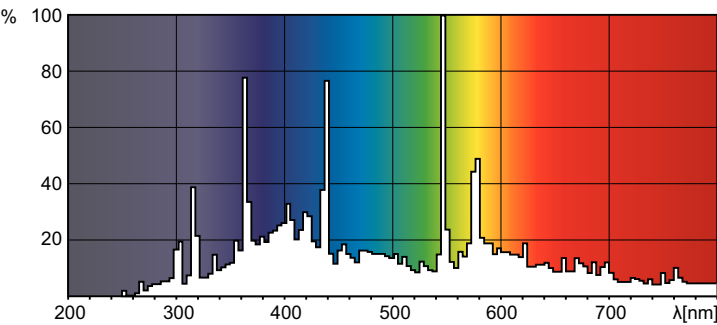

Spectral Power Distribution Colour - MSD 200 1CT/40

