



MSR Hot Restrike

MSR 1200 HR 1CT/2

High-efficiency hot restrike metal halide lamps designed for optimum light collection

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Product data

General Information	
Cap-Base	G38 [G38]
Operating Position	UNIVERSAL [Any or Universal (U)]
Life to 50% Failures (Nom)	1,000 hour(s)
Light Technical	
Color Code	- [Not Specified]
Luminous Flux	103,000 lm
Chromaticity Coordinate X (Nom)	323
Chromaticity Coordinate Y (Nom)	328
Correlated Color Temperature (Nom)	6000 K
Luminous Efficacy (Rated) (Min)	75 lm/W
Luminous Efficacy (rated) (Nom)	88 lm/W
Color rendering index (CRI)	95
Arc Length O (Nom)	10.0 mm
Operating and Electrical	
Power Consumption	1,200 W

Lamp Current (Nom)	13.5 A
Controls and Dimming	
Dimmable	Yes
Product Data	
Order product name	MSR 1200 HR 1CT/2
Full product name	MSR 1200 HR 1CT/2
Full product code	872790092606400
Order code	928105005114
Material Nr. (12NC)	928105005114
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8727900926064
Numerator - Packs per outer box	2
EAN/UPC - Case	8727900926071


MSR Hot Restrike

Dimensional drawing

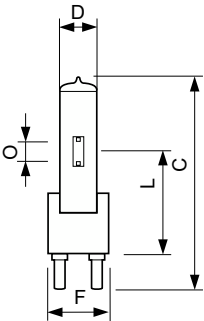

Product	D (max)	O	L (min)	L (max)	L	C (max)	F (max)	F	F (min)
MSR 1200	40 mm	10.0	106	108 mm	107	200	67 mm	65	63 mm
HR 1CT/2		mm	mm		mm	mm		mm	

Photometric data

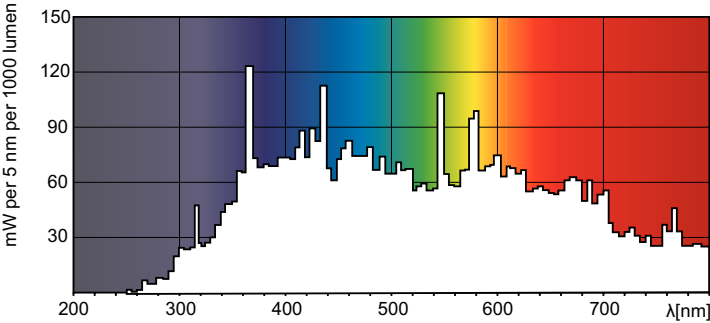

Spectral Power Distribution Colour – MSR 1200 HR 1CT/2

