



# MSR Hot Restrike

## MSR 1200W HR 1CT/2

Thanks to an optimized color temperature and a high color rendering index, the MSR Hot Restrike creates perfect 'daylight' in any condition. Also, the single ended lamp design enables hot re-ignition, which ensures daylight lighting and superb color rendition is always instantly available. They also incorporate the innovative P3 technology, developed by Philips, which allows use at higher temperatures and therefore extends lifetime and consistency of high-quality light output.

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Lamp contains mercury.
- Manage in Accord with Disposal Laws.
- See: [www.lamprecycle.org](http://www.lamprecycle.org) or 1-800-555-0050

### Product data


General Information		Color rendering index (CRI)	
Cap-Base	G38		95
Operating Position	UNIVERSAL [Any or Universal (U)]	Arc Length O (Nom)	10.0 mm
Life to 50% Failures (Nom)	1,000 hour(s)	<b>Operating and Electrical</b>	
<b>Light Technical</b>		Power Consumption	1,200 W
Color Code	- [Not Specified]	Lamp Current (Nom)	13.5 A
Luminous Flux	103,000 lm	<b>Controls and Dimming</b>	
Chromaticity Coordinate X (Nom)	323	Dimmable	Yes
Chromaticity Coordinate Y (Nom)	328	<b>Product Data</b>	
Correlated Color Temperature (Nom)	6000 K	Order product name	MSR 1200 HR 1CT/2
Luminous Efficacy (Rated) (Min)	75 lm/W	Full product name	MSR 1200W HR 1CT/2
Luminous Efficacy (rated) (Nom)	88 lm/W		

# MSR Hot Restrike

Full product code	872790092606400
Order code	245829
Material Nr. (12NC)	928105005114
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8727900926064


Numerator - Packs per outer box	2
EAN/UPC - Case	8727900926071

## Dimensional drawing

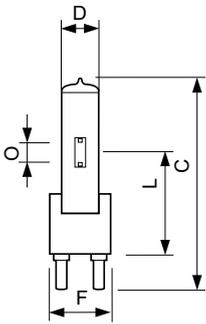

Product	D (max)	O (max)	L (min)	L (max)	L (max)	C (max)	F (max)	F (min)	F (min)
MSR 1200	1-5/8	7/16	4-3/16	4-1/4	4-1/4	7-7/8	2-11/16	2-9/16	2-1/2
HR 1CT/2	inch								

## Photometric data

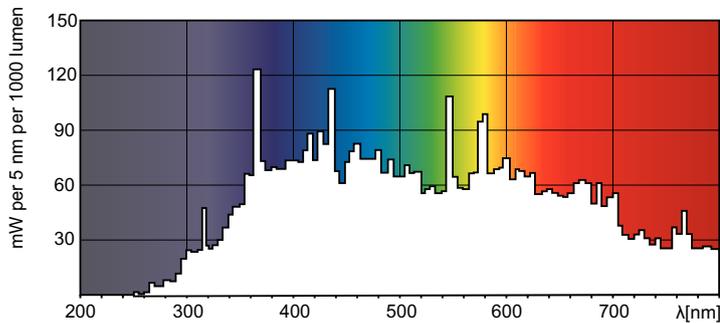

Spectral Power Distribution Colour - MSR 1200 HR 1CT/2

