



# MSR Gold™ FastFit

## MSR Gold™ 1500/1 FastFit 1CT/4

All lamps burn out eventually, but when this happens with single ended MSR Gold™ FastFit, it is replaced in seconds – thanks to the specially designed lamp base and lamp holder. This lamp provides a high beam intensity of pure, white light for a truly illuminating performance, while the gold-plated caps provide superior heat protection and prevent premature failure. P3 technology allows use in any position and at higher temperatures, further extending lamp life and consistency of high-quality light output. Also, because the FastFit design is applied to Philips Halogen lamps, switching between lamp technologies can be done quickly and easily. The Philips MSR Gold™ 1200 FastFit can be operated in a lamp wattage range between 800W and 1400W.

### Product data

General Information		Color Rendering Index (Nom)	
Cap-Base	PGJX50 [ PGJX50]		85
Operating Position	Universal [ Universal]	Operating and Electrical	
Main Application	Entertainment	Power (Rated) (Nom)	1500.0 W
Life to 50% Failures (Nom)	750 h	Lamp Current (Nom)	15.3 A
System Description	FastFit	Ignition Supply Voltage (Min)	198 V
Light Technical		Controls and Dimming	
Color Code	1	Dimmable	Yes
Luminous Flux (Min)	114750 lm	Mechanical and Housing	
Luminous Flux (Nom)	127500 lm	Cap-Base Information	PGJX50
Chromaticity Coordinate X (Nom)	328	Luminaire Design Requirements	
Chromaticity Coordinate Y (Nom)	334	Bulb Temperature (Max)	950 °C
Correlated Color Temperature (Nom)	5700 K	Pinch Temperature (Max)	500 °C
Luminous Efficacy (rated) (Nom)	85 lm/W		
Color Rendering Index at 4h (Nom)	92		
Color Rendering Index at 20h (Nom)	95		

# MSR Gold™ FastFit

## Product Data


Order product name	MSR Gold™ 1500/1 FastFit 1CT/4
EAN/UPC - Product	8718696402757
Order code	260497
Numerator - Quantity Per Pack	1

Numerator - Packs per outer box	4
Material Nr. (12NC)	928108905115
Net Weight (Piece)	0.133 kg

## Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


## Dimensional drawing




MSR GOLD 1500/1 FastFit

Product	D (max)	O	L (min)	L (max)	L	C (max)	F
MSR Gold™ 1500/1 FastFit 1CT/4	28 mm	6.3 mm	64 mm	66 mm	65 mm	128 mm	50 mm

## Photometric data

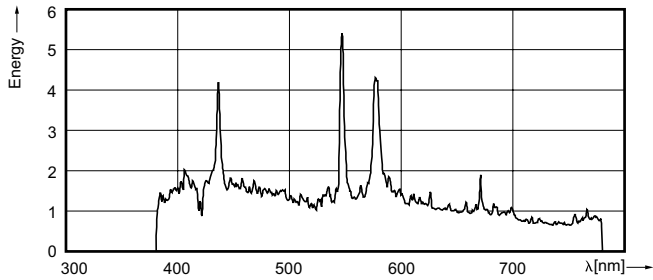

MSR Gold™ 1500 FastFit

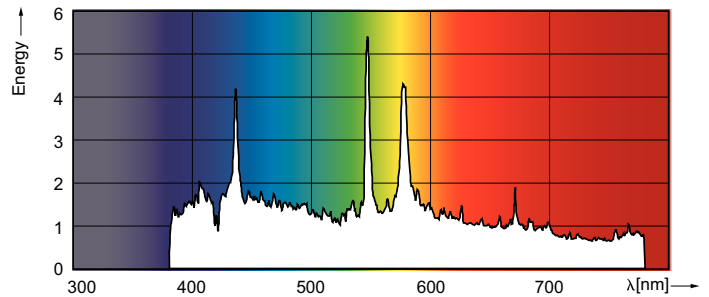

MSR Gold™ 1500 FastFit

