



MASTER SON-T PIA Plus

MST SON-T PIA Plus 400W E40 1SL/12

High Pressure Sodium lamp with clear tubular outer bulb, high output and long reliable lifetime

Warnings and Safety

- · Control gear must include end-of-life protection (IEC60662, IEC 62035)
- · Control gear must include end-of-life protection (IEC60662, IEC 62035)
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

| General Information | | | | | |
|------------------------------------|----------------------------------|--|--|--|--|
| Cap-Base | E40 [E40] | | | | |
| Operating Position | UNIVERSAL [Any or Universal (U)] | | | | |
| Flux measurement reference | Sphere | | | | |
| Life to 50% Failures (Nom) | 36,000 hour(s) | | | | |
| | | | | | |
| Light Technical | | | | | |
| Color Code | 220 [CCT of 2000K] | | | | |
| Luminous Flux | 55,900 lm | | | | |
| Chromaticity Coordinate X (Nom) | 0.535 | | | | |
| Chromaticity Coordinate Y (Nom) | 0.42 | | | | |
| Correlated Color Temperature (Nom) | 2000 K | | | | |
| Luminous Efficacy (rated) (Nom) | 137 lm/W | | | | |
| | | | | | |

| Color rendering index (CRI) | - |
|-----------------------------|---------|
| Arc Length O (Nom) | 83 mm |
| | |
| Operating and Electrical | |
| Power Consumption | 408.0 W |
| Voltage (Nom) | 105 V |
| Voltage (Nom) | 105 V |
| | |
| Controls and Dimming | |
| Dimmable | Yes |
| | |
| Mechanical and Housing | |
| Bulb Finish | Clear |
| | |


Datasheet, 2023, April 14 data subject to change

MASTER SON-T PIA Plus

| Bulb Shape | T46 [T 46mm] | | | |
|-------------------------------|------------------------------------|--|--|--|
| | | | | |
| Approval and Application | | | | |
| Energy Efficiency Class | E | | | |
| Mercury (Hg) Content (Max) | 19.6 mg | | | |
| Mercury (Hg) Content (Nom) | 20 mg | | | |
| Energy Consumption kWh/1000 h | 408 kWh | | | |
| EPREL Registration Number | 473370 | | | |
| | | | | |
| Product Data | | | | |
| Order product name | MST SON-T PIA Plus 400W E40 1SL/12 | | | |


| Full product name | MST SON-T PIA Plus 400W E40 1SL/12 |
|---------------------------------|------------------------------------|
| Full product code | 871829118077700 |
| Order code | 928144809293 |
| Material Nr. (12NC) | 928144809293 |
| Numerator - Quantity Per Pack | 1 |
| EAN/UPC - Product/Case | 8718291180777 |
| Numerator - Packs per outer box | 12 |
| EAN/UPC - Case | 8718291180784 |
| | |


Dimensional drawing




| Product | D (max) | 0 | L | C (max) |
|------------------------------------|---------|-------|--------|---------|
| MST SON-T PIA Plus 400W E40 1SL/12 | 48 mm | 83 mm | 175 mm | 279 mm |

Photometric data





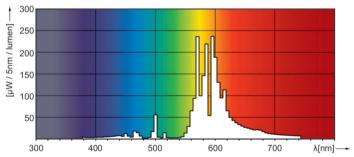



Light Distribution Diagram - MST SON-T PIA Plus 400W E40 1SL/12

Spectral Power Distribution Colour - MST SON-T PIA Plus 400W E40 1SL/12

MASTER SON-T PIA Plus

Lifetime

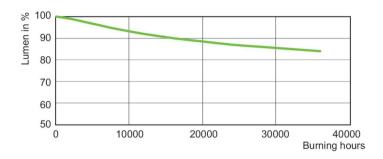



Lumen Maintenance Diagram - MST SON-T PIA Plus 400W E40 1SL/12

Life Expectancy Diagram - MST SON-T PIA Plus 400W E40 1SL/12



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.