



MASTER SOX-E

MASTER SOX-E 66W BY22d 1SL/12

Low Pressure Sodium lamp with improved efficacy

Warnings and Safety

- Lamps may use electronic or electromagnetic control gear

Product data

General Information	
Cap-Base	BY22D [BY22d]
Operating Position	P20 [Parallel +/-20D or Horizontal(HOR)]
Life to 50% Failures (Nom)	18,000 hour(s)

Light Technical	
Correlated Color Temperature (Nom)	1800 K
Luminous Efficacy (rated) (Nom)	170 lm/W

Operating and Electrical	
Power Consumption	65.0 W
Voltage (Nom)	123 V
Voltage (Nom)	123 V

Controls and Dimming	
Dimmable	No

Mechanical and Housing	
Bulb Shape	T65 [T 65mm]


Approval and Application	
Mercury (Hg) Content (Nom)	0 mg
Energy Consumption kWh/1000 h	75 kWh

Product Data	
Order product name	MASTER SOX-E 66W BY22d 1SL/12
Full product name	MASTER SOX-E 66W BY22d 1SL/12
Full product code	871150017978415
Order code	928145900008
Material Nr. (12NC)	928145900008
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8711500179784
Numerator - Packs per outer box	12
EAN/UPC - Case	8711500182777


MASTER SOX-E

Dimensional drawing

Product	D (max)	C (max)
MASTER SOX-E 66W BY22d 1SL/12	66 mm	528 mm




Photometric data

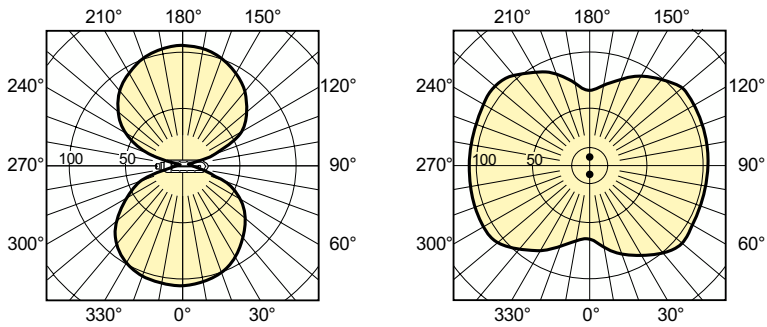


Light Distribution Diagram - MASTER SOX-E 66W BY22d 1SL/12

Lifetime

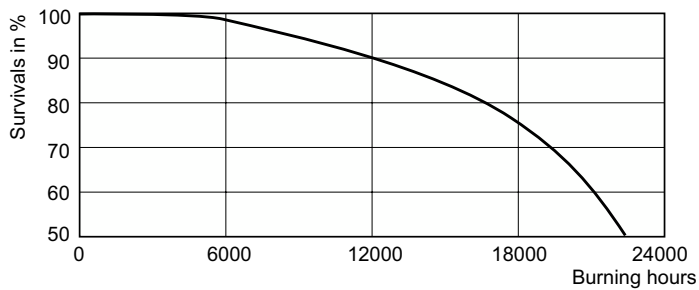

Life Expectancy Diagram - MASTER SOX-E 66W BY22d 1SL/12

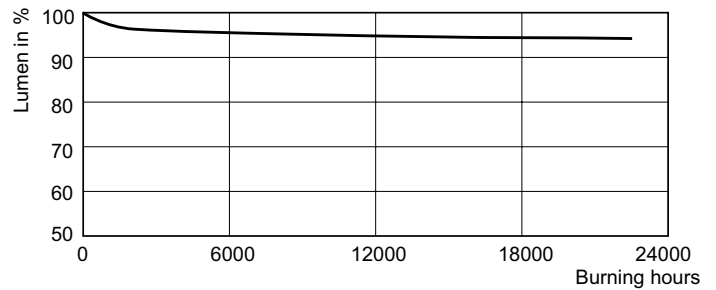

Lumen Maintenance Diagram - MASTER SOX-E 66W BY22d 1SL/12

MASTER SOX-E

