



# MASTER SDW-T

## MASTER SDW-T 100W/825 PG12-1 1SL/12

Range of high-efficiency, discharge lamps with warm colour to be used in open luminaires

### Product data

General Information	
Cap base	PG12-1 [ PG12-1]
Burning Position	UNIVERSAL [ Any/Universal]
Life to 5% failures (nom.)	5000 h
Life to 20% failures (nom.)	10000 h
Life to 50% failures (nom.)	15000 h
Useful life (nom.)	10000 h
ANSI code HID	-
System description	High Voltage [ 200-250V (HV)]

Light Technical	
Colour Code	825 [ CCT of 2,500 K]
Lamp Luminous Flux (Nom)	5000 lm
Colour Designation	Golden White
Lumen maintenance 2,000 hours (nom.)	85 %
Lumen maintenance 5,000 hours (nom.)	80 %
Chromaticity coordinate X (nom.)	464
Chromaticity coordinate Y (nom.)	404
Colour Temperature, horizontal (Nom)	2500 K
Lamp Luminous Efficacy EM (Nom)	52 lm/W
Colour Rendering Index,horiz (Nom)	83

Operating and Electrical	
Power (Rated) (Nom)	97.0 W
Lamp current run-up (max.)	2.8 A

Lamp current (EM) (nom.)	1.31 A
Ignition peak voltage (max.)	5000 V
Ignition supply voltage (min.)	205 V
Voltage (Max)	108 V
Voltage (Min)	88 V
Voltage (Nom)	98 V

Controls and Dimming	
Dimmable	no

Mechanical and Housing	
Bulb finish	Clear (CL)
Bulb material	Hard Glass

Approval and Application	
Energy efficiency label (EEL)	B
Mercury (Hg) content (nom.)	11.4 mg
Energy Consumption kWh/1000 h	107 kWh

Luminaire Design Requirements	
Bulb temperature (max.)	450 °C
Cap base temperature (max.)	120 °C

Product Data	
Full product code	871150073404415

# MASTER SDW-T


Order product name	MASTER SDW-T 100W/825 PG12-1 1SL/12
EAN/UPC – product	8711500734044
Order code	928154109227
Numerator – quantity per pack	1
Numerator – packs per outer box	12

Material no. (12NC)	928154109227
Net weight (piece)	0.055 kg
ILCOS Code	STH-100-H/E-PG12

## Warnings and Safety

- Use only with dedicated Philips control gear
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.



## Dimensional drawing



SDW-T 100W/825 PG12-1

Product	D (max)	O	L	C (max)
MASTER SDW-T 100W/825 PG12-1 1SL/12	32 mm	18.3 mm	91 mm	149 mm

## Photometric data

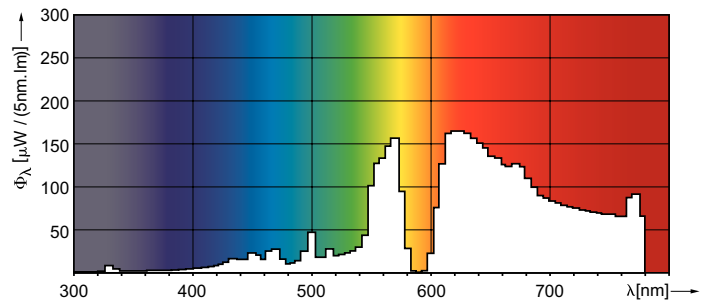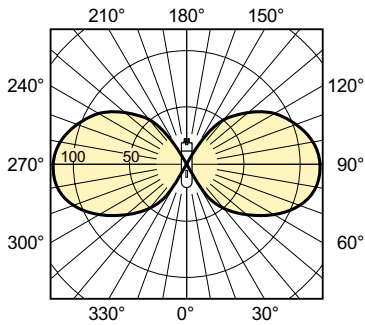

# MASTER SDW-T

## Lifetime

