



HORTI

MASTER GreenPower CG T 600W E40

High Pressure Sodium lamp with clear outer bulb, optimized growthlight output and maintenance

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Product data

General Information	
Cap-Base	E40
Operating Position	UNIVERSAL [Any or Universal (U)]
Life to 50% Failures (Nom)	32,000 hour(s)
Light Technical	
Color Code	220 [CCT of 2000K]
Chromaticity Coordinate X (Nom)	0.533
Chromaticity Coordinate Y (Nom)	0.432
Correlated Color Temperature (Nom)	2000 K
Luminous Efficacy (rated) (Nom)	142.4 lm/W
Color rendering index (CRI)	26
Arc Length O (Nom)	151 mm
Operating and Electrical	
Power Consumption	618.0 W
Voltage (Nom)	130 V
Voltage (Nom)	130 V

Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Clear
Bulb Shape	T46
Approval and Application	
Mercury (Hg) Content (Nom)	30.0 mg
Energy Consumption kWh/1000 h	680 kWh
Product Data	
Order product name	MASTER GreenPower CG T 600W E40
Full product name	MASTER GreenPower CG T 600W E40
Full product code	871829123187500
Order code	928158809214
Material Nr. (12NC)	928158809214
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8718291548379
Numerator - Packs per outer box	54


EAN/UPC - Case	8718291231875
----------------	---------------

Dimensional drawing

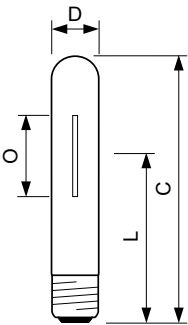


Product	D (max)	O	L	C (max)	A
MASTER GreenPower CG T 600W E40	47 mm	151 mm	166 mm	279 mm	205 mm

Photometric data

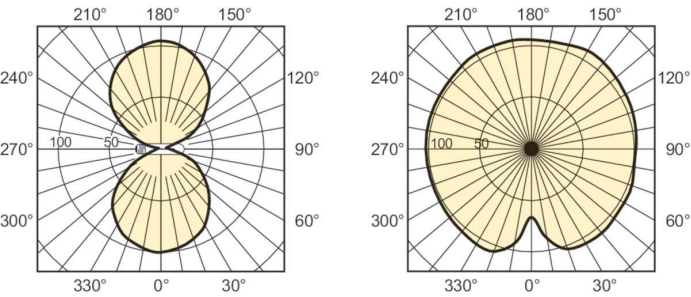


Light Distribution Diagram - MASTER GreenPower CG T 600W E40

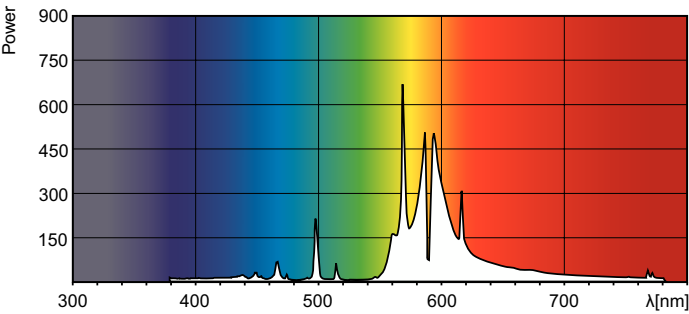


Spectral Power Distribution Colour - MASTER GreenPower CG T 600W E40

Lifetime

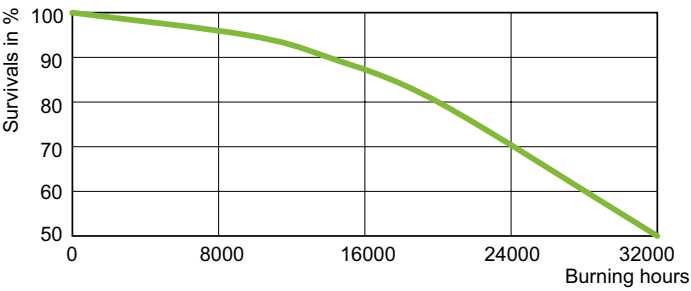

Life Expectancy Diagram - MASTER GreenPower CG T 600W E40

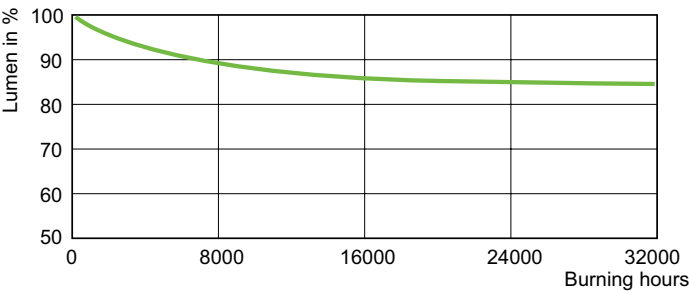

Lumen Maintenance Diagram - MASTER GreenPower CG T 600W E40

