



# **MSR**

# MSR 1200/2.1CT/3

MSR – bright vivid colours, always The high colour rendering index of the single ended MSR series ensures that everyone in the audience can enjoy the true colours of the scenery, the stage props, the players and their costumes – in fact everything that is on stage can be made bright and vivid in daylight quality light. Also, thanks to the single ended lamp concept, the luminaire has optimal light collection and direction possibilities to help ensure brightness on stage exactly where and when it is needed. In addition, the MSR can be used in any burning position for easy set–up and convenience.

#### **Warnings and Safety**

• A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

#### **Product data**

General Information				
Cap-Base	G22 [G22]			
Operating Position	UNIVERSAL [Any or Universal (U)]			
Life to 50% Failures (Nom)	800 hour(s)			
Light Technical				
Color Code	2			
Luminous Flux	104,000 lm			
Chromaticity Coordinate X (Nom)	302			
Chromaticity Coordinate Y (Nom)	320			
Correlated Color Temperature (Nom)	7200 K			
Luminous Efficacy (rated) (Nom)	87 lm/W			
Color rendering index (CRI)	85			

Arc Length O (Nom)	10.0 mm	
Operating and Electrical		
Power Consumption	1,200 W	
Lamp Current (Nom)	13.8 A	
Controls and Dimming		
Dimmable	No	
Product Data		
Order product name	MSR 1200/2.1CT/3	
Full product name	MSR 1200/2.1CT/3	
Full product code	872790091133600	
Order code	928171805114	


Datasheet, 2023, April 15 data subject to change

## **MSR**

Material Nr. (12NC)	928171805114
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8727900911336
Numerator - Packs per outer box	3


EAN/UPC - Case	8727900911343
----------------	---------------

## Dimensional drawing



Product	D (max)	0	L (min)	L (max)	L	C (max)	F
MSR 1200/2.1CT/3	40 mm	10.0 mm	84 mm	86 mm	85 mm	175 mm	53 mm

#### Photometric data

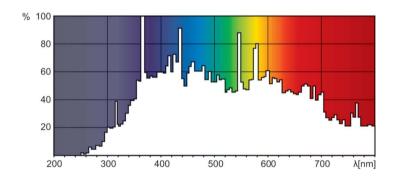

Spectral Power Distribution Colour - MSR 1200/2.1CT/3



© 2023 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.