



MSR Gold™ SA Double Ended

MSR Gold™ 700 SA/2 DE 1CT/4

To optimize the total lifetime of the double ended MSR Gold™ SA Double Ended lamps, the caps are plated with gold. This provides superior heat protection and thereby minimizes premature failure of the lamp and lamp holder, as well as ensuring extended consistent performance. In addition, the highly innovative P3 technology, developed by Philips, allows the lamp to be used at higher temperatures, which further extends service life and consistency of high-quality light output.

Product data

General Information		Color Rendering Index (Nom)	
Base	SFC10-4 [SFC10-4]		75
Operating Position	Universal [Universal]	Operating and Electrical	
Main Application	Studio/Disco	Power (Rated) (Nom)	700 W
Life to 50% Failures (Nom)	750 h	Lamp Current (Nom)	11.5 A
System Description	SA/2 DE	Ignition Supply Voltage (Min)	198 V
Light Technical		Controls and Dimming	
Color Code	- [Not Specified]	Dimmable	No
Initial lumen (Min)	43200 lm	Mechanical and Housing	
Initial lumen (Nom)	48000 lm	Cap-Base Information	SFC10-4
Chromaticity Coordinate X (Nom)	299	Luminaire Design Requirements	
Chromaticity Coordinate Y (Nom)	320	Pinch Temperature (Max)	500 °C
Correlated Color Temperature (Nom)	7500 K	Product Data	
Luminous Efficacy (Rated) (Min)	62 lm/W	Order product name	MSR Gold™ 700 SA/2 DE 1CT/4
Luminous Efficacy (rated) (Nom)	69 lm/W		
Color Rendering Index (Min)	62		

MSR Gold™ SA Double Ended


EAN/UPC - Product	8718291221234
Order code	287136
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4

Material Nr. (12NC)	928174705115
Net Weight (Piece)	34.000 g

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
- Lamp contains mercury. Manage in Accord with Disposal Laws. See: www.lamprecycle.org or 1-800-555-0050



Dimensional drawing

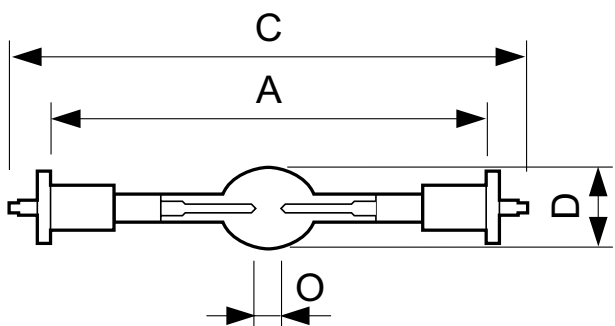

Product	D (max)	O	A (min)	A (max)	A	C (max)
MSR Gold™ 700 SA/2 DE 1CT/4	19 mm	4.0 mm	114.4 mm	115.2 mm	114.8 mm	136 mm

MSR GOLD 700 SA/2 DE

Photometric data

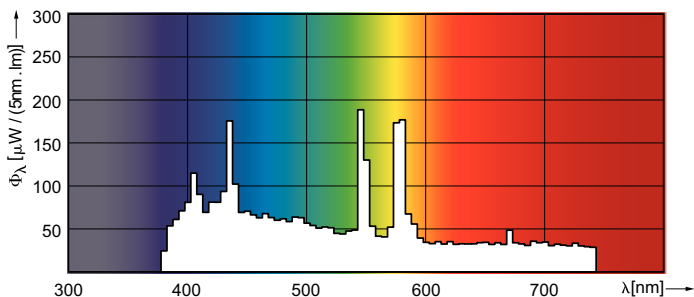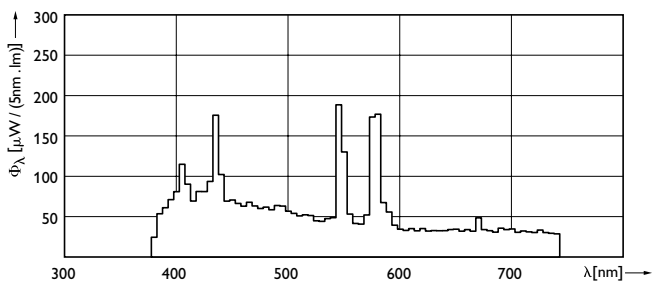

MSR Gold™ 700 SA/2 DE

MSR Gold™ 700 SA/2 DE

MSR Gold™ SA Double Ended

